


| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 99518 W17A | APP CRS 175° | Rwy Idg TDZE Apt Elev | 6800 699 699 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) RWY 17

DURANT RGNL/EAKER FLD (DUA)

| | | | |
|--|--|----------------------------------|---|
| RNP APCH. | | ODALS | MISSED APPROACH: Climb to 2500 direct ZEGRA and hold. |
| <p>▼ Inop table does not apply to LPV and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat A/B visibility to 1 ¼ SM.</p> | | | |
| AWOS-3 124.175 | FORT WORTH CENTER 124.75 323.0 | UNICOM 123.05 (CTAF) 0 | |

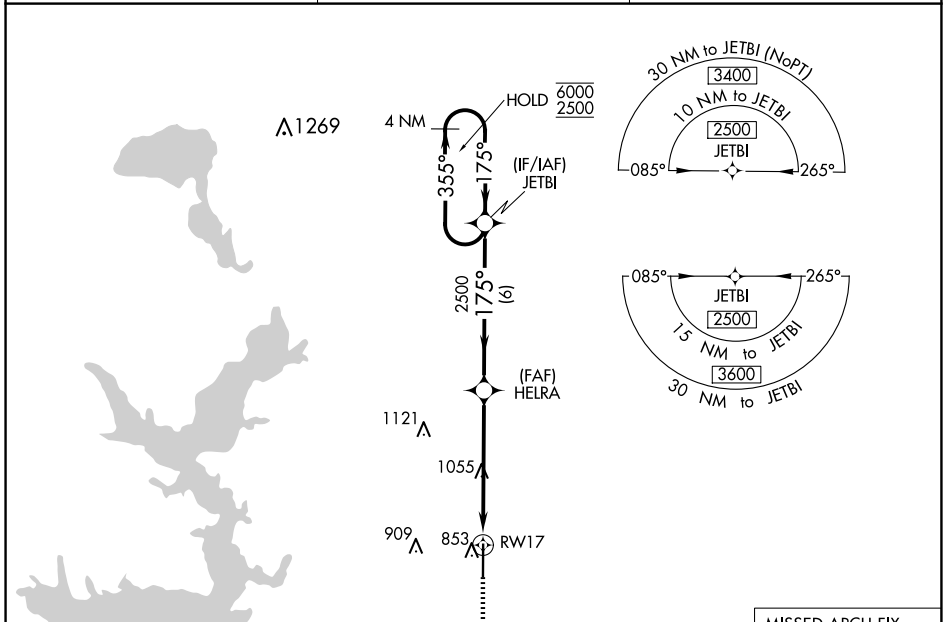

| | |
|--|----------|
| ELEV 699 | TDZE 699 |
| <p>175° to RWY 17</p> <p>Z I</p> <p>001 X 0089</p> <p>35</p> | |

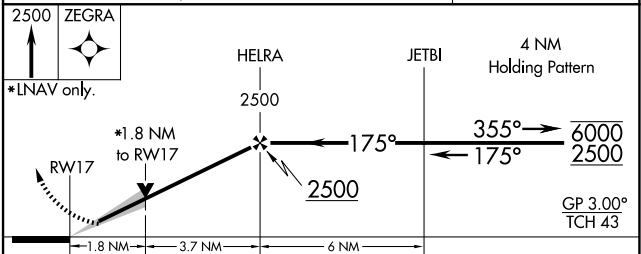

| CATEGORY | A | B | C | D |
|--------------|----------|---------------|-----------------|-----------------|
| LPV DA | | 899-3/4 | 200 (200-3/4) | NA |
| LNAV/VNAV DA | | 1133-1 1/8 | 434 (500-1 1/8) | NA |
| LNAV MDA | 1320-3/4 | 621 (700-3/4) | 1320-1 3/4 | 621 (700-1 3/4) |