

WAAS CH 58133 W17A	APP CRS 177°	Rwy Idg 4020 TDZE 1176 Apt Elev 1176
--	------------------------	---

RNAV (GPS) RWY 17

HAMPTON MUNI (HPT)




▽ VDP and Baro-VNAV NA when using Mason City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).
△ NA DME/DME RNP: 0.3 NA. Helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use Mason City altimeter setting and increase all DA 67 feet and all MDA 80 feet, and LNAV/VNAV all Cats visibility ¼ mile.

MISSED APPROACH:
Climb to 4000 direct WURLU and hold, continue climb-in-hold to 4000.

AWOS-3
121.025

MINNEAPOLIS CENTER
134.0 288.3

UNICOM
122.7 (CTAF) 0

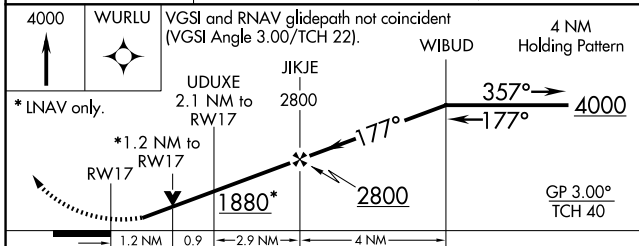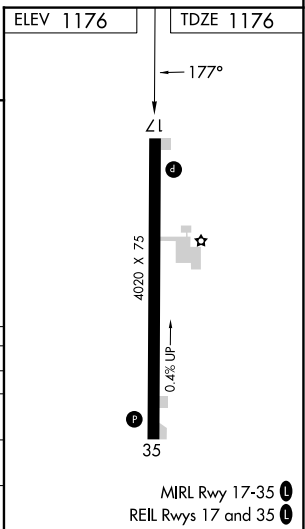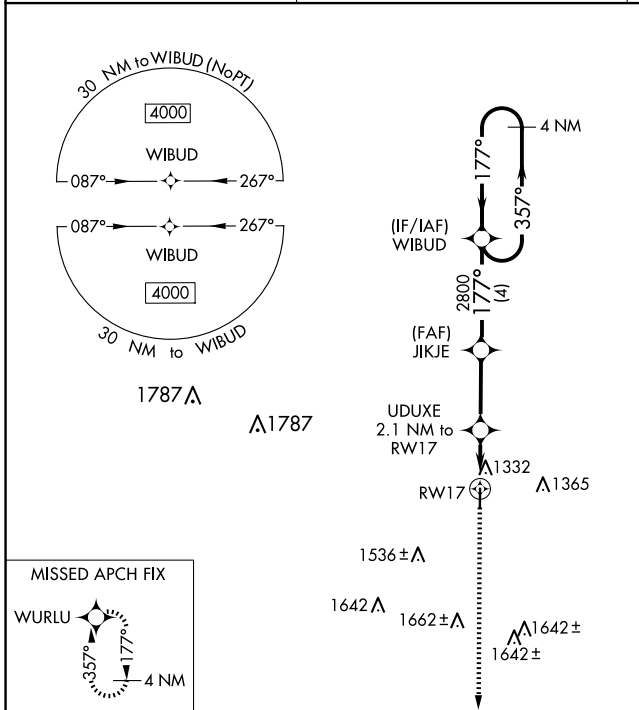

CATEGORY	A	B	C	D
LPV DA	1426-1	250 (300-1)		NA
LNAV/VNAV DA	1605-1½	429 (500-1½)		NA
LNAV MDA	1600-1	424 (500-1)		NA
C CIRCLING	1640-1	464 (500-1)		NA