RNAV (GPS) RWY 27

TILLITT FLD (1S3)

WAAS	APP CRS		
CH **78125**	**268°**	Rwy Idg	**4799**
W27A		TDZE	**2728**
		Apt Elev	**2729**

T
NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 53°C (128°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Miles City altimeter setting: increase LPV and LNAV/VNAV DA to 3066 and all visibilities ⅛ mile. Increase all MDA 100 feet and all Cat C and D visibilities ¼ mile. VDP and Baro-VNAV NA when using Miles City altimeter setting.

MISSED APPROACH: Climb to 6000 direct FREYA and on track 218° to CONUK and hold.

AWOS-AV	SALT LAKE CENTER	UNICOM
122.8	**126.85 305.2**	**122.8** (CTAF) L

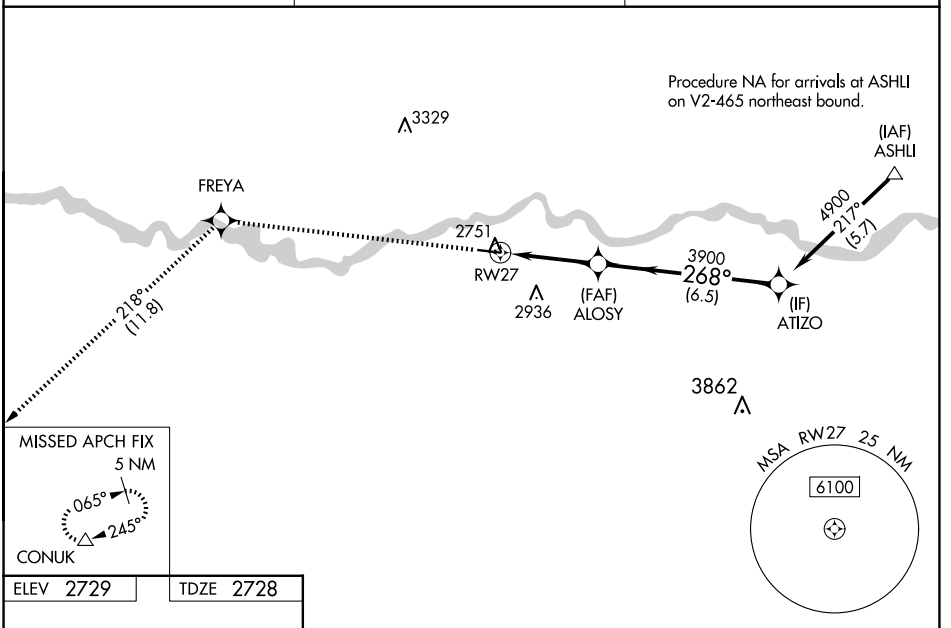

ELEV 2729	TDZE 2728



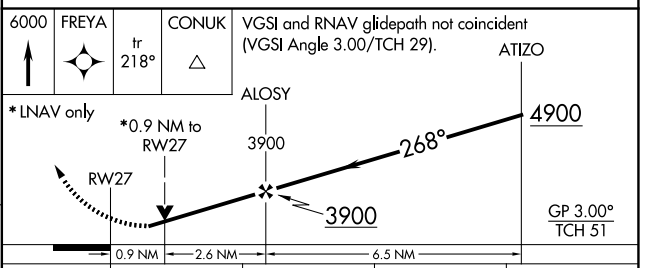

CATEGORY	A	B	C	D
LPV DA	2978-1	250 (300-1)		
LNAV/VNAV DA	2978-1	250 (300-1)		
LNAV MDA	3040-1	312 (400-1)		
C CIRCLING	3160-1 431 (500-1)	3320-1 591 (600-1)	3340-1¾ 611 (700-1¾)	3700-3 971 (1000-3)

MIRL Rwy 9-27 L

NW-1, 20 FEB 2025 to 20 MAR 2025
NW-1, 20 FEB 2025 to 20 MAR 2025