RNAV (GPS) RWY 27

ARENS FLD (RWN)

WAAS	APP CRS		
CH **40238**	**273°**	Rwy Idg	**3641**
W27A		TDZE	**708**
		Apt Elev	**708**

T A NA — Baro-VNAV NA. Use Knox altimeter setting; when not received, use Rochester altimeter setting and increase all DA/MDA 20 feet and LNAV/VNAV all Cats visibility ⅛ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2400 direct ITELE and hold.

OXI AWOS-3	SOUTH BEND APP CON ★	UNICOM
135.775	**132.05 257.8**	**122.8** (CTAF) L

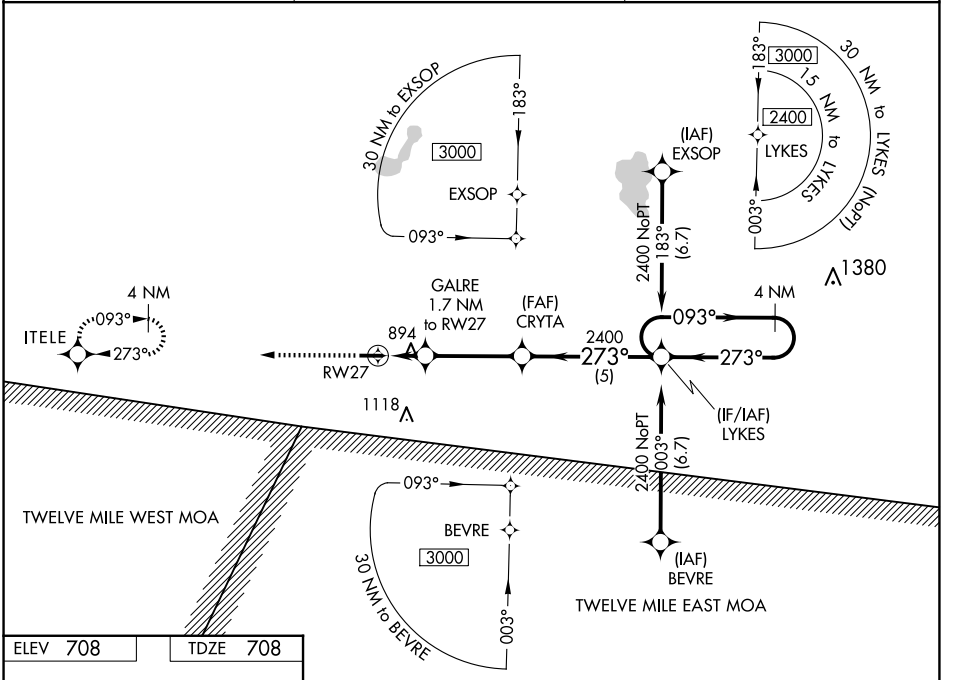

ELEV 708	TDZE 708



MIRL Rwy 9-27 L
REIL Rwys 9 and 27 L

2400 | ITELE

*LNAV only.

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 23).

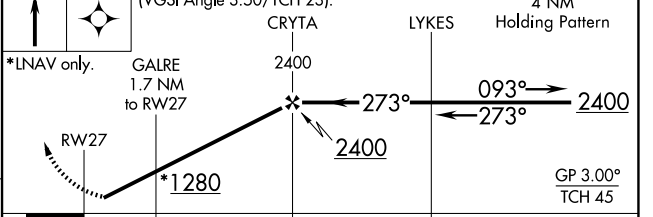

CATEGORY	A	B	C	D
LPV DA	995-1 287 (300-1)			NA
LNAV/VNAV DA	1224-1¾ 516 (600-1¾)			NA
LNAV MDA	1200-1 492 (500-1)		1200-1⅜ 492 (500-1⅜)	NA
C CIRCLING	1240-1 532 (600-1)		1480-2¼ 772 (800-2¼)	NA

EC-2, 20 FEB 2025 to 20 MAR 2025
EC-2, 20 FEB 2025 to 20 MAR 2025