


| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 97533 W19A | APP CRS 193° | Rwy Idg TDZE Apt Elev | 3200 857 858 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 19



KEWANEE MUNI (EZI)

| | | |
|--|--|---|
| RNP APCH - GPS. | | MISSED APPROACH: Climb to 2400 direct JUBDI and hold. |
| <p>▽ Baro-VNAV NA. Use Galesburg altimeter setting. When local altimeter setting not received, use Moline altimeter setting and increase LPV DA to 1212 feet; increase LNAV/VNAV DA to 1446 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDAs 40 feet and LNAV visibility Cat C $\frac{1}{8}$ SM, and Circling visibility Cat C $\frac{1}{4}$.</p> | | |

| | |
|---|---------------------------------|
| QUAD CITY APP CON ★ 133.275 257.8 | UNICOM 122.8 (CTAF) 0 |
|---|---------------------------------|

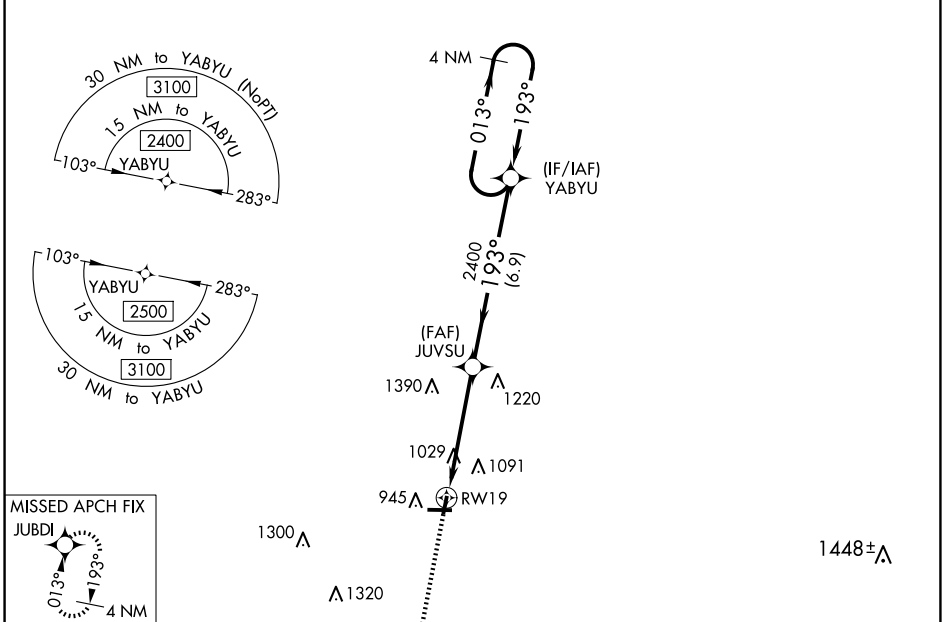

| | |
|----------|----------|
| ELEV 858 | TDZE 857 |
|----------|----------|

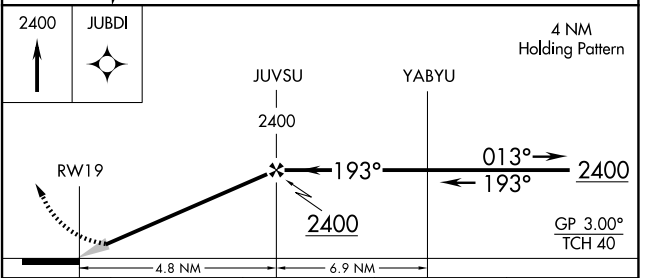

| CATEGORY | A | B | C | D |
|-------------------|---|-----------------------|--|----|
| LPV DA | 1182-1 325 (400-1) | | | NA |
| LNAV/VNAV DA | 1416-1 $\frac{5}{8}$ 559 (600-1 $\frac{5}{8}$) | | | NA |
| LNAV MDA | 1400-1 | 543 (600-1) | 1400-1 $\frac{5}{8}$ 543 (600-1 $\frac{5}{8}$) | NA |
| ☑ CIRCLING | 1400-1 542 (600-1) | 1520-1 662 (700-1) | 1520-1 $\frac{3}{4}$ 662 (700-1 $\frac{3}{4}$) | NA |