

WAAS CH 82538 W35A	APP CRS 354°	Rwy Idg TDZE 1223 Apt Elev 1232
--	------------------------	---

RNAV (GPS) RWY 35



GEORGE L SCOTT MUNI (3Y2)

RNP APCH.



NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Decatur altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Decatur altimeter setting and increase LPV DA to 1524 all Cats and all visibilities 1/8 mile, LNAV/VNAV DA to 1773 all Cats and all visibilities 1/8 mile; increase all MDA 60 feet and LNAV Cat C visibility 1/4 mile.

MISSED APPROACH: Climb to 3000 direct CADJU and hold.

MINNEAPOLIS CENTER **118.85** UNICOM **122.8 (CTAF) 0**

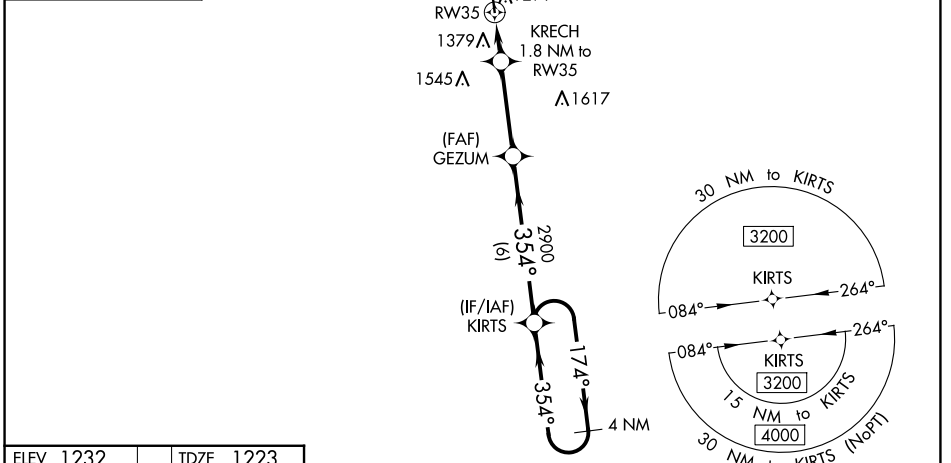

ELEV 1232 TDZE 1223

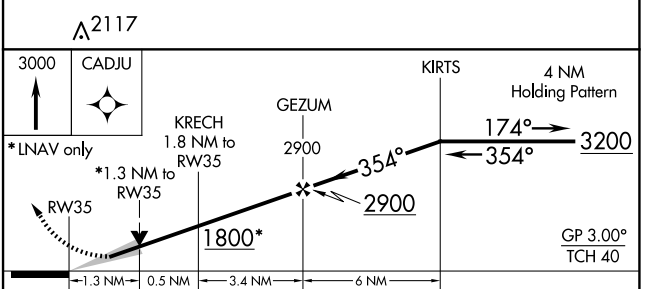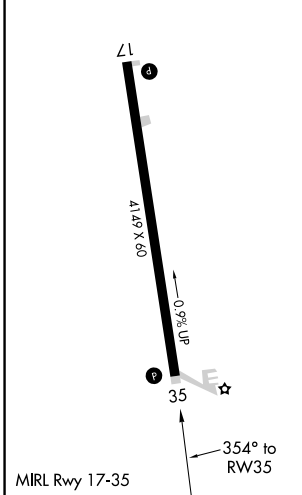

CATEGORY	A	B	C	D
LPV DA	1473-1 250 (300-1)			NA
LNAV/VNAV DA	1722-1 7/8 499 (500-1 1/8)			NA
LNAV MDA	1640-1	417 (500-1)	1640-1 1/8 417 (500-1 1/8)	NA
C CIRCLING	1740-1	508 (600-1)	1860-1 3/4 628 (700-1 1/4)	NA

NC-3, 20 FEB 2025 to 20 MAR 2025

NC-3, 20 FEB 2025 to 20 MAR 2025