



WAAS CH 93544 W04A	APP CRS 038°	Rwy ldg TDZE Apt Elev	4870 1240 1243
----------------------------------------	------------------------	-----------------------------	-------------------------------------------

RNAV (GPS) RWY 4R



CHANDLER MUNI (CHD)

RNP APCH - GPS.	MISSED APPROACH: (Do not exceed 210K until DECTU) Climb to 2200 then climbing right turn to 4000 direct to DECTU and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.	

ATIS 128.325	PHOENIX APP CON 123.7 363.0	CHANDLER TOWER ★ 126.1 (CTAF) 0 (North and West) (South and East)	GND CON 124.4	UNICOM 122.95
------------------------	---------------------------------------	--------------------------------------------------------------------------------	-------------------------	-------------------------

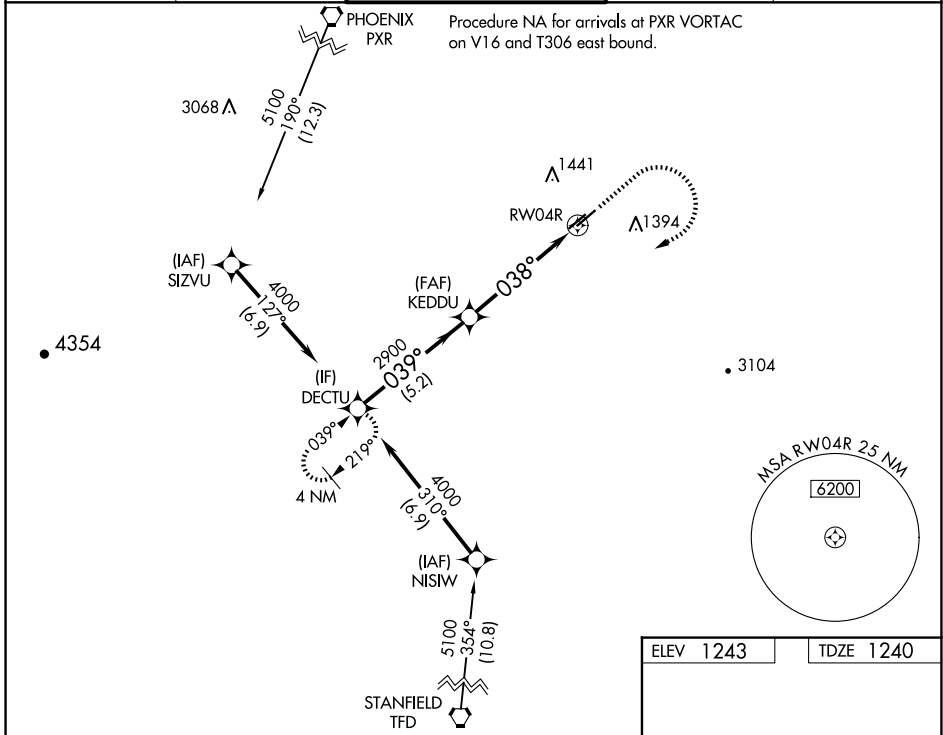

ELEV 1243	TDZE 1240
-----------	-----------

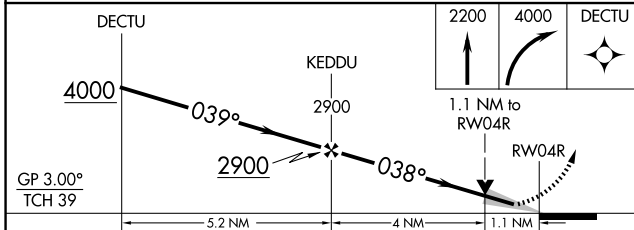

CATEGORY	A	B	C	D
LPV DA	1490-3/4	250 (300-3/4)		NA
LNAV/VNAV DA	1640-1 1/8	400 (400-1 1/8)		NA
LNAV MDA	1640-1	400 (400-1)	1640-1 1/8 400 (400-1 1/8)	NA
◻ CIRCLING	1700-1 457 (500-1)	1760-1 517 (600-1)	1760-1 1/2 517 (600-1 1/2)	NA

REIL Rwy 4R and 22L
MIRL Rwy 4L-22R and 4R-22L

SW-4, 20 FEB 2025 to 20 MAR 2025

SW-4, 20 FEB 2025 to 20 MAR 2025