

# KILNS FIVE DEPARTURE (RNAV)


SE-2, 20 FEB 2025 to 20 MAR 2025

CHARLOTTE DEP CON  
128.325 307.8  
AWOS-3  
128.175  
CLNC DEL  
121.75 254.375  
GND CON  
121.75 254.375  
STANLY COUNTY TOWER\*  
126.275 (CTAF) 291.9

**TOP ALTITUDE:  
3000**

RNAV 1 - DME/DME/IRU or GPS.  
RADAR required.

- NOTE: For turbojets only.
- NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.
- NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.

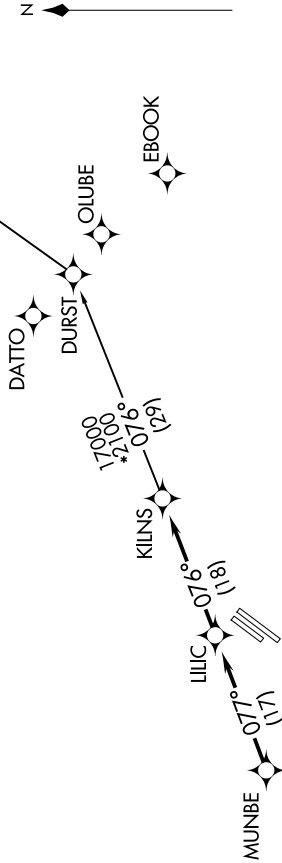


NOTE: Chart not to scale.

## DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC, on RADAR vectors to **MUNBE**, then on depicted route to **KILNS**, then on **AUDII** Transition. Maintain 3000. Expect clearance to filed altitude within 10 minutes after departure.

**AUDII TRANSITION (KILNS5.AUDII)**

**TAKEOFF MINIMUMS**  
 Rwy 4L, 22R: NA - environmental.  
 Rwy 22L: Standard.  
 Rwy 4R: 300-1¼ or Standard with minimum climb of 315' per NM to 1000.



# KILNS FIVE DEPARTURE (RNAV)

SE-2, 20 FEB 2025 to 20 MAR 2025