WAAS	APP CRS	Rwy Idg	8000
CH 93809	352°	TDZE	5515
W35A		Apt Elev	5515

RNAV (GPS) RWY 35

COLORADO AIR AND SPACE PORT (CFO)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 46°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 8000 direct CUDNI and on track 353° to PHLAT and hold.

ATIS	DENVER APP CON	SPACE PORT TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
119.025	128.25 371.95	120.2 (CTAF) L	124.7	124.7	121.75 (When twr closed)	122.95

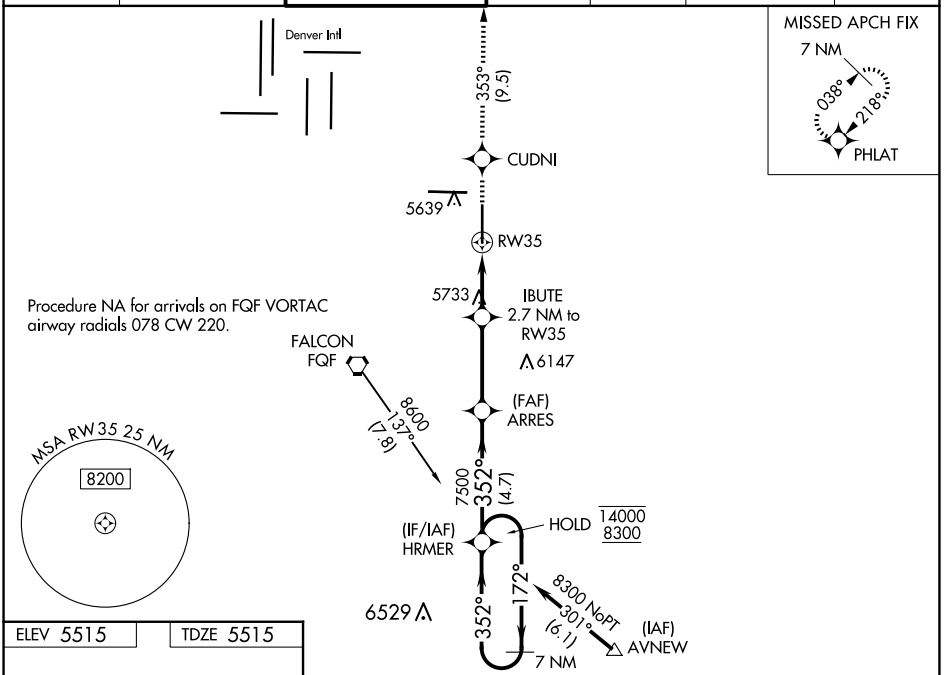

ELEV 5515 TDZ 5515

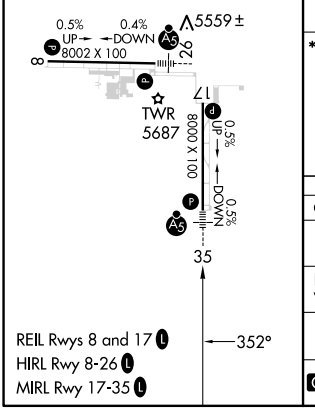

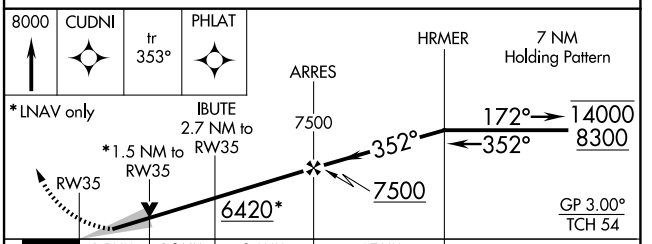

CATEGORY	A	B	C	D
LPV DA	5715-½ 200 (200-½)			
LNAV/VNAV DA	5783-½ 268 (300-½)			
LNAV MDA	6040-½ 525 (600-½)		6040-1 525 (600-1)	
C CIRCLING	6040-1 525 (600-1)		6100-1½ 585 (600-1½)	6300-2½ 785 (800-2½)

SW-1, 20 FEB 2025 to 20 MAR 2025
SW-1, 20 FEB 2025 to 20 MAR 2025