WAAS	APP CRS	Rwy Idg	4605
CH 49108	353°	TDZE	1823
W35A		Apt Elev	1827

RNAV (GPS) RWY 35

CURTIS FLD (BBD)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). When local altimeter setting not received, use Junction altimeter setting and increase all DA/MDA 120 feet, increase LPV, LNAV/VNAV all Cats visibility ½ mile, LNAV Cat C visibility ¼ mile. Baro-VNAV NA when using Junction altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 4000 direct OVACU and via 263° track to VIVCU and left turn via 150° track to BREDY and hold.

AWOS-3	HOUSTON CENTER	UNICOM
118.375	132.35 317.5	122.8 (CTAF) L

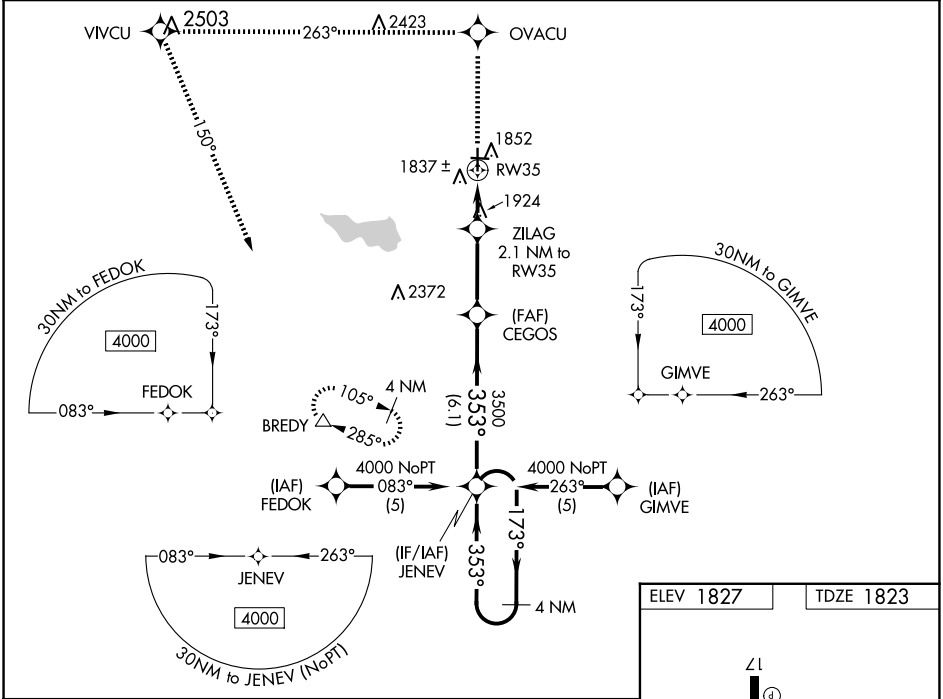

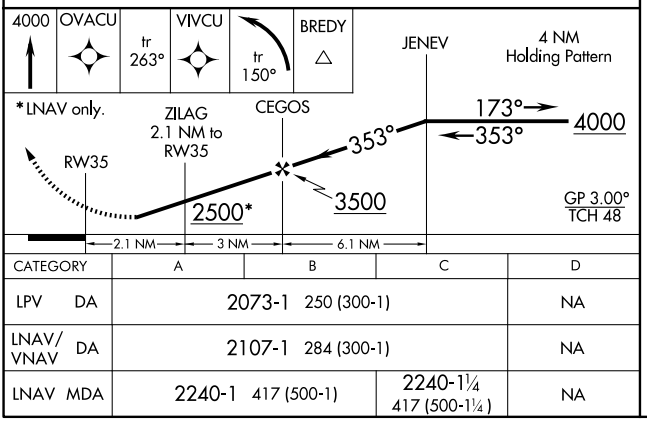

CATEGORY	A	B	C	D
LPV DA	2073-1 250 (300-1)			NA
LNAV/ VNAV DA	2107-1 284 (300-1)			NA
LNAV MDA	2240-1 417 (500-1)		2240-1¼ 417 (500-1¼)	NA

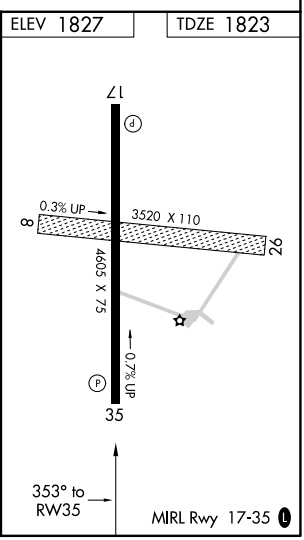

SC-3, 20 FEB 2025 to 20 MAR 2025
SC-3, 20 FEB 2025 to 20 MAR 2025