ILS or LOC RWY 34R

DENVER INTL (DEN)

LOC/DME I-OUF	APP CRS	Rwy Idg 12000
111.1	353°	TDZE 5354
Chan 48		Apt Elev 5434

T S-LOC 34R DME or RADAR required. Simultaneous approach authorized with Rwy 35L/R. For inoperative ALSF, increase S-LOC Cat C/D visibility to RVR 5500.

ALSF-2

MISSED APPROACH: Climb to 5800 then climbing left turn to 10000 on heading 270° and on FQF VORTAC R-306 to HYGEN/FQF 37.9 DME/RADAR and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON	CLNC DEL	CPDLC
125.6 379.9 (ARR) 134.025 (DEP)	119.3 307.3 (N) 120.35 379.3 (S)	135.3 351.95	121.35 379.175 (W) 121.85 377.1 (E)	118.75	

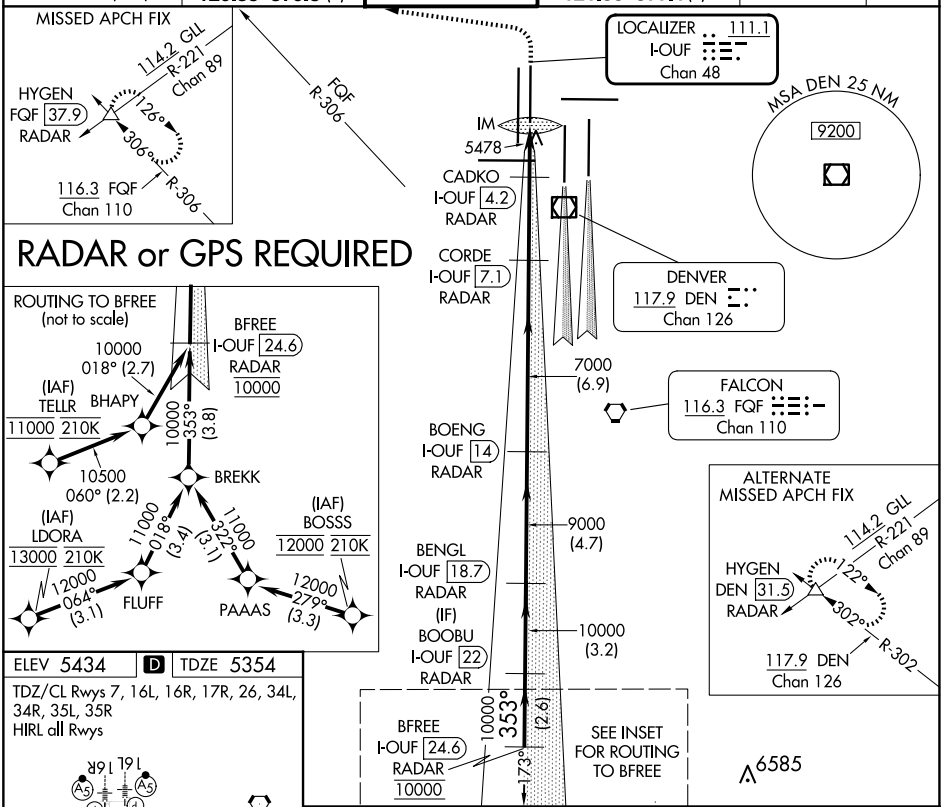

RADAR or GPS REQUIRED

ELEV 5434	D	TDZE 5354

TDZ/CL Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R
HIRL all Rwys



FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

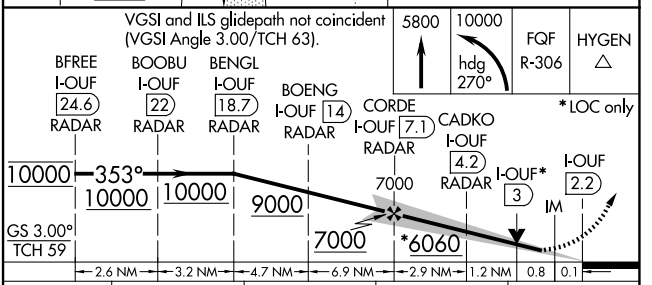

CATEGORY	A	B	C	D
S-ILS 34R	5554/18 200 (200-½)			
S-LOC 34R	5700/24 346 (300-½)		5700/30 346 (300-⅝)	

SW-1, 20 FEB 2025 to 20 MAR 2025
SW-1, 20 FEB 2025 to 20 MAR 2025