

WAAS CH 78024 W09A	APP CRS 092°	Rwy Idg 4300 TDZE 22 Apt Elev 22
--	------------------------	---

RNAV (GPS) RWY 9R

NORTH PALM BEACH COUNTY GENERAL AVIATION (F45)

⚠


NA

Circling NA to Rws 9L and 27R. Baro-VNAV NA when using Palm Beach Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter not received, use Palm Beach Intl altimeter setting and increase LPV DA to 300 feet; increase LNAV/VNAV DA to 316 feet; increase all MDA 40 feet and LNAV Cats C/D visibility 1⁄8 SM. Rwy 9R helicopter visibility reduction below 3⁄4 SM NA.

MISSED APPROACH:

Climb to 1700 then climbing left turn to 2500 direct YIGBO and hold.

AWOS-3 119.975	PALM BEACH APP CON 128.3 317.4	CLNC DEL 120.825	UNICOM 123.075 (CTAF) 0
--------------------------	--	----------------------------	-----------------------------------

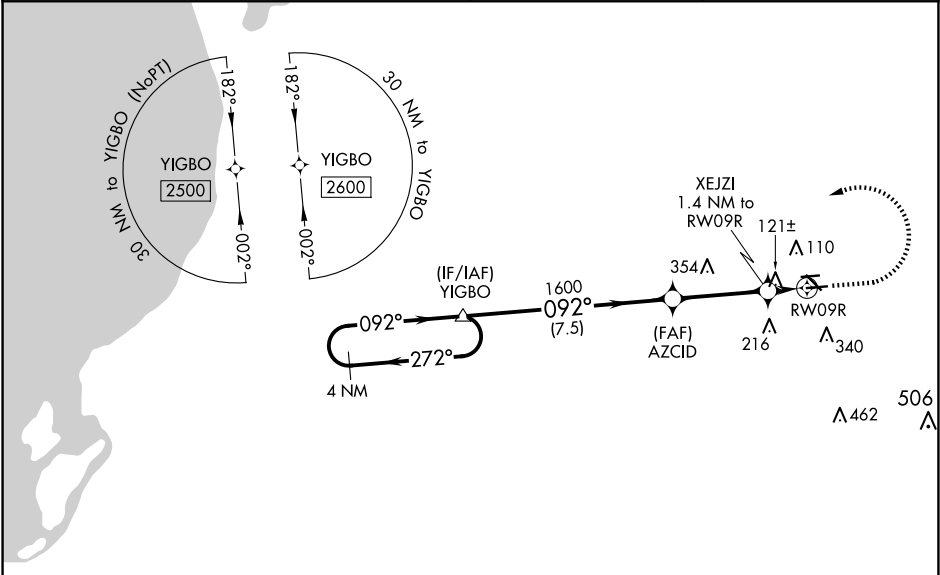

ELEV 22		TDZE 22		
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40). 4 NM Holding Pattern YIGBO 2500 ← 272° 092° → GP 3.00° TCH 43 AZCID 1600 XEJZI 1.4 NM to RWY09R *LNAV only. 1600 *500 RWY09R 7.5 NM 3.4 NM 1.4 NM				
CATEGORY	A	B	C	D
LPV DA	272-7⁄8 250 (300-7⁄8)			
LNAV/VNAV DA	288-7⁄8 266 (300-7⁄8)			
LNAV MDA	420-1 398 (400-1)		420-1½ 398 (400-1½)	
CIRCLING	460-1 438 (500-1)	480-1 458 (500-1)	700-2 678 (700-2)	720-2¼ 698 (700-2¼)
MIRL Rws 9R-27L and 14-32 0				0
REIL Rws 9R, 14, 27L and 32 0				0