




LOC/DME I-VUQ 111.9 Chan 56	APP CRS 241°	Rwy ldg 10900 TDZE 997 Apt Elev 1009
---	------------------------	---

I LS or LOC RWY 24R


JAMES M COX DAYTON INTL (DAY)

<p>Simultaneous approach authorized. For inop ALS, increase S-LOC 24R Cat C/D visibility to RVR 6000.</p>		<p>MALSR</p>	<p>MISSED APPROACH: Climb to 3000 then right turn direct DQN VOR/DME and hold.</p>	
ATIS 125.8	COLUMBUS APP CON 134.45 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9	CLNC DEL 121.75

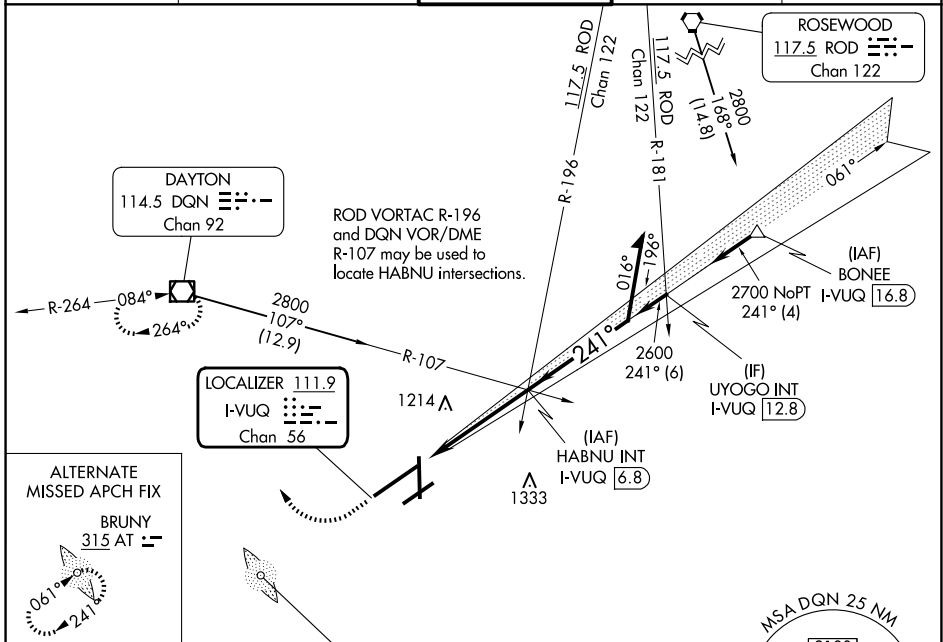

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

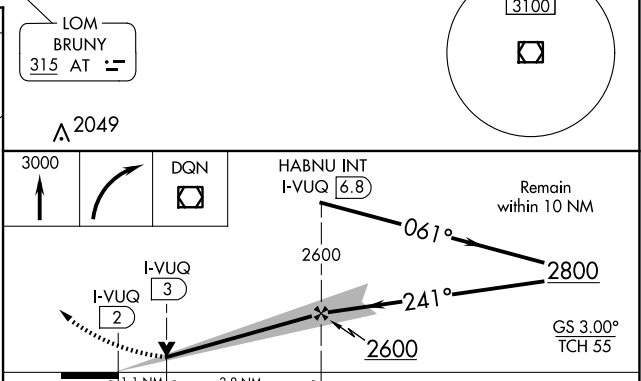

CATEGORY	A	B	C	D
S-ILS 24R	1203/24		206 (200-½)	
S-LOC 24R	1400/24	403 (400-½)	1400/40	403 (400-¾)
<input checked="" type="checkbox"/> CIRCLING	1580-1	571 (600-1)	1580-1½ 571 (600-1½)	1640-2 631 (700-2)