



|                           |                        |                             |   |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-RXZ<br><b>111.3</b> | APP CRS<br><b>223°</b> | Rwy ldg<br>TDZE<br>Apt Elev | <b>7300</b><br><b>652</b><br><b>680</b> |
|---------------------------|------------------------|-----------------------------|---|

# ILS or LOC RWY 22R

CHICAGO O'HARE INTL (ORD)

|  |  |       |  |  |  |
|--|--|-------|--|--|--|
| RADAR required for procedure entry.                    |  | MALSR | MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 direct DPA VOR/DME and hold. |  |  |
| Simultaneous approach authorized.<br>DME from GCO DME. |  |       |  |  |  |

|  |  |   |  |   |                          |       |
|--|--|---|--|---|--------------------------|-------|
| D-ATIS<br><b>135.4</b><br><b>282.225</b> | CHICAGO APP CON<br><b>119.0</b> <b>292.125</b> | O'HARE TOWER<br><b>126.9</b> <b>348.0</b> | <b>124.125</b> GND CON<br><b>118.05</b> (TWR NORTH)<br><b>226.675</b> (TWR SOUTH)<br><b>226.675</b> (ALL TWRs) | (TWR CENTER)<br><b>121.75</b> (OBND)<br><b>121.9</b> (IBND) | CLNC DEL<br><b>121.6</b> | CPDLC |
|--|--|---|--|---|--------------------------|-------|

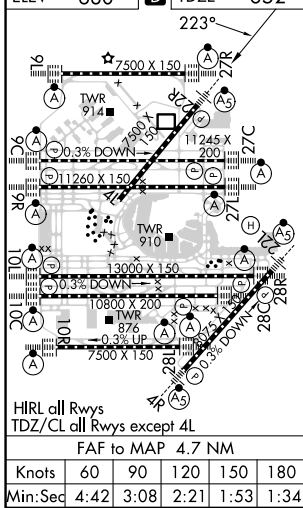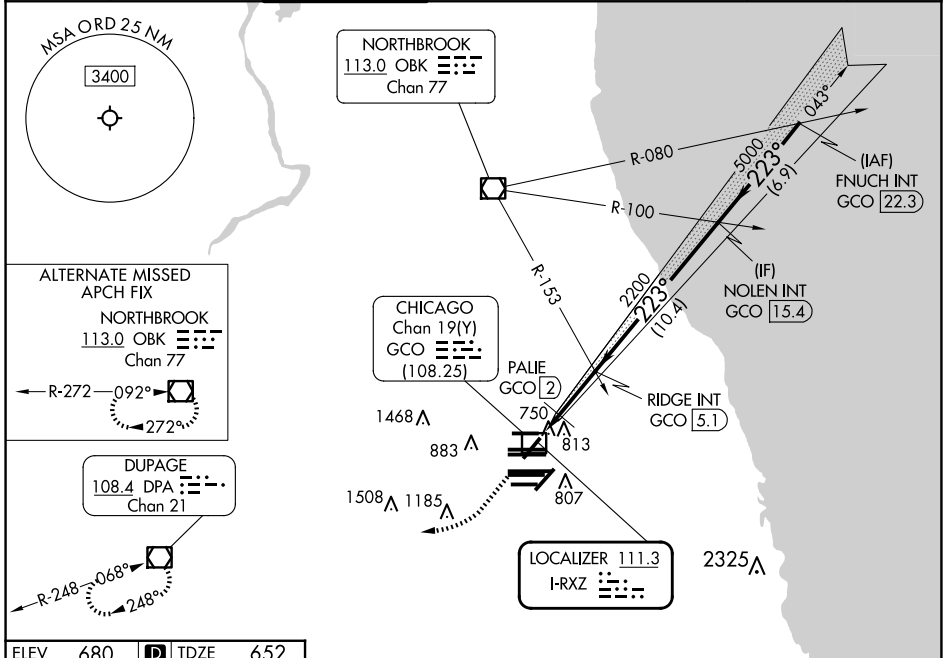

|                    |          |             |  |              |         |              |
|--------------------|----------|-------------|--|--------------|---------|--------------|
| ELEV 680           | <b>D</b> | TDZE 652    | 1300 4000 DPA VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 69).  |              |         |              |
|                    |          |             | FNUCH INT GCO 22.3<br>RIDGE INT GCO 5.1<br>NOLEN INT GCO 15.4<br>7000<br>223°<br>5000<br>2200<br>1220<br>0.8 NM 0.8 3.1 NM 10.4 NM 6.9 NM<br>GS 3.00° TCH 49 |              |         |              |
| CATEGORY           | A        | B           | C  | D            |         |              |
| S-ILS 22R          | 852/18   |             | 200 (200-½)  |              |         |              |
| S-LOC 22R          | 1220/24  | 568 (600-½) | 1220-1¼  | 568 (600-1¼) |         |              |
| <b>C</b> CIRCLING  | 1220-1   | 540 (600-1) | 1220-1½  | 540 (600-1½) | 1460-2½ | 780 (800-2½) |
| PALIE FIX MINIMUMS |          |             |  |              |         |              |
| S-LOC 22R          | 980/24   | 328 (300-½) | 980/26   | 328 (300-½)  |         |              |
| <b>C</b> CIRCLING  | 1220-1   | 540 (600-1) | 1220-1½  | 540 (600-1½) | 1460-2½ | 780 (800-2½) |