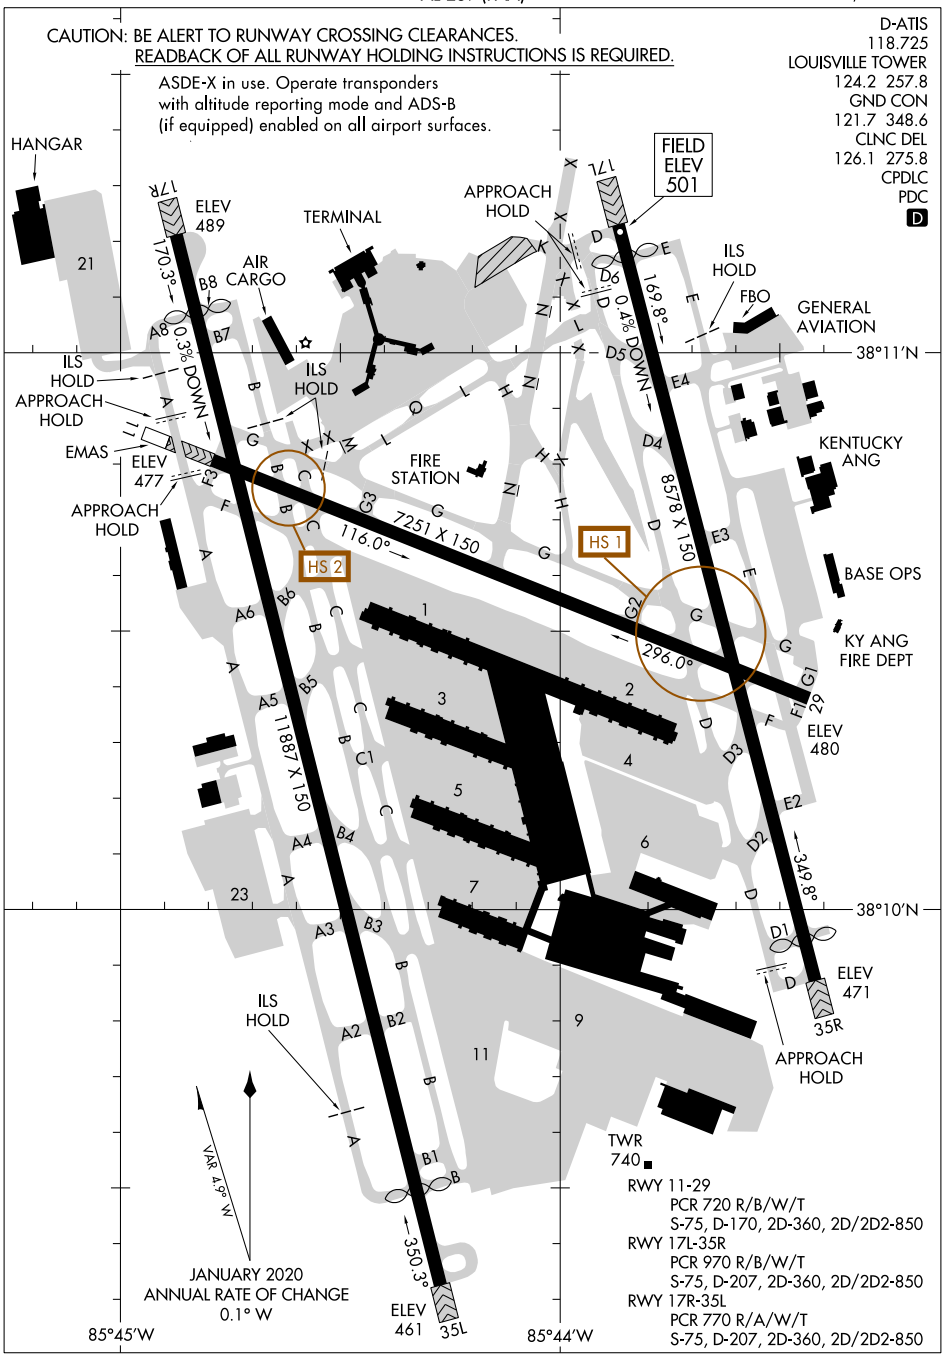
CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.
ASDE-X in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces.
D-ATIS 118.725
LOUISVILLE TOWER 124.2 257.8
GND CON 121.7 348.6
CLNC DEL 126.1 275.8
CPDLC
PDC
D
HANGAR
17R
ELEV 489
170.3°
0.3% DOWN
TERMINAL
AIR CARGO
APPROACH HOLD
FIELD ELEV 501
17L
169.8°
0.4% DOWN
ILS HOLD
FBO
GENERAL AVIATION
38°11'N
ILS HOLD
APPROACH HOLD
EMAS
ELEV 477
APPROACH HOLD
ILS HOLD
FIRE STATION
KENTUCKY ANG
7251 X 150
116.0°
8578 X 150
HS 1
HS 2
BASE OPS
296.0°
KY ANG FIRE DEPT
ELEV 480
11887 X 150
349.8°
38°10'N
ELEV 471
35R
APPROACH HOLD
ILS HOLD
TWR 740
VAR 4.9° W
JANUARY 2020 ANNUAL RATE OF CHANGE 0.1° W
350.3°
ELEV 461
35L
85°45'W
85°44'W
RWY 11-29
PCR 720 R/B/W/T
S-75, D-170, 2D-360, 2D/2D2-850
RWY 17L-35R
PCR 970 R/B/W/T
S-75, D-207, 2D-360, 2D/2D2-850
RWY 17R-35L
PCR 770 R/A/W/T
S-75, D-207, 2D-360, 2D/2D2-850