

LOC/DME I-LDZ 108.9 Chan 26	APP CRS 123°	Rwy Idg TDZE Apt Elev	8956 541 618
--	------------------------	-----------------------------	---

ILS or LOC RWY 12L


ST LOUIS LAMBERT INTL (STL)

Disregard OM indications. For inop ALS, increase S-ILS 12L Cat E visibility to RVR 4000 and S-LOC 12L Cat E visibility to 1½ SM. Simultaneous approach authorized with Rwy 11. Simultaneous approach authorized with Rwy 12R requires use of vertical guidance; maintain last altitude until established on the glideslope.



MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct TOY VORTAC and hold.


D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	--	---	--------------------------------	-------

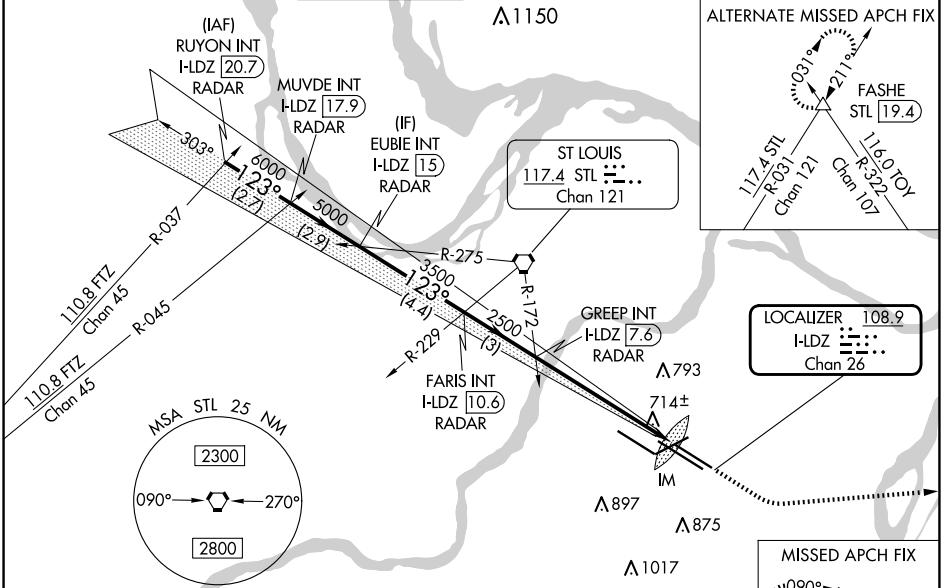

NC-3, 20 MAR 2025 to 17 APR 2025

NC-3, 20 MAR 2025 to 17 APR 2025


ELEV 618	D	TDZE 541
----------	----------	----------

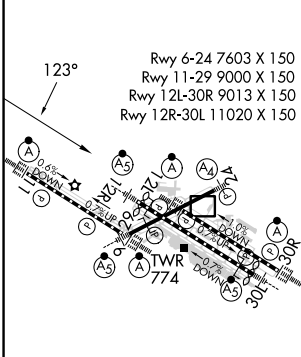

HIRL all Rwy TDZ/CL Rwy 11, 12L, 12R, 29, and 30R
FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

RADAR and DME REQUIRED

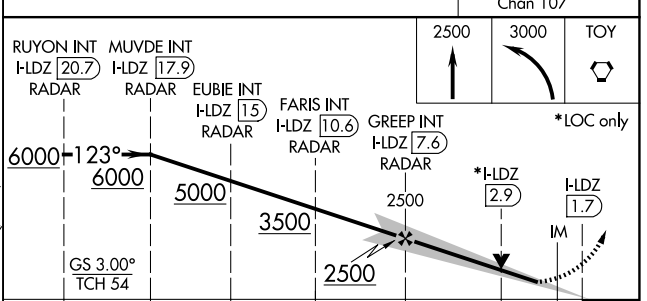

CATEGORY	A	B	C	D	E
S-ILS 12L	741/18		200 (200-½)	741/24 200 (200-½)	
S-LOC 12L	980/24	439 (400-½)	980/40 439 (400-¾)	980/50	439 (400-1)