


WAAS CH 99621 W30B	APP CRS 303°	Rwy ldg 10679 TDZE 583 Apt Elev 618
--	------------------------	--

RNAV (GPS) Y RWY 30L

ST LOUIS LAMBERT INTL (STL)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 3000 direct TUDNE and hold, continue climb-in-hold to 3000.
<p>▼ LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized with Rwy 29. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1 3/8 SM. # RVR 1800 authorized with use of FD or AP or HUD to DA.</p>		

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 118.5 257.7	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	---------------------------------------	---	--------------------------------	-------

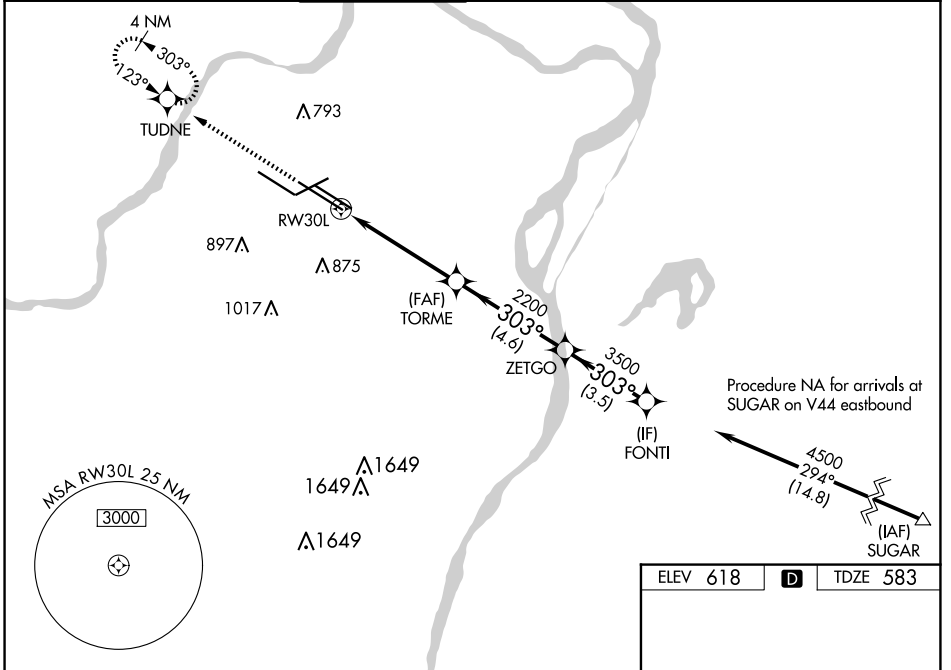

NC-3, 20 MAR 2025 to 17 APR 2025

NC-3, 20 MAR 2025 to 17 APR 2025

ELEV 618	D	TDZE 583
<p>Rwy 6-24 7603 X 150 Rwy 11-29 9000 X 150 Rwy 12L-30R 9013 X 150 Rwy 12R-30L 11020 X 150</p>		
<p>HIRL all Rwys TDZ/CL Rwys 11, 12L, 12R, 29, and 30R</p>		

3000	TUDNE	FONTI		
*LNAV only				
<p>*1.4 NM to RWY 30L</p>				
CATEGORY	A	B	C	D
LPV DA#	783/24		200 (200-1/2)	
LNAV/VNAV DA	974/35		391 (400-5/8)	
LNAV MDA	1100/24 517 (500-1/2)		1100/55 517 (500-1)	