


WAAS CH 40015 W28A	APP CRS 277°	Rwy Idg TDZE Apt Elev	9351 50 50
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Z RWY 28



SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH.	<p>▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).</p> <p>△ MISSED APPROACH: Climb to 2600 direct TILEE and hold.</p>

ATIS 123.75	SAVANNAH APP CON* 125.3 371.875	SAVANNAH TOWER* 125.975 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775	UNICOM 122.95
-----------------------	---	--	-------------------------------	-----------------------------------	-------------------------

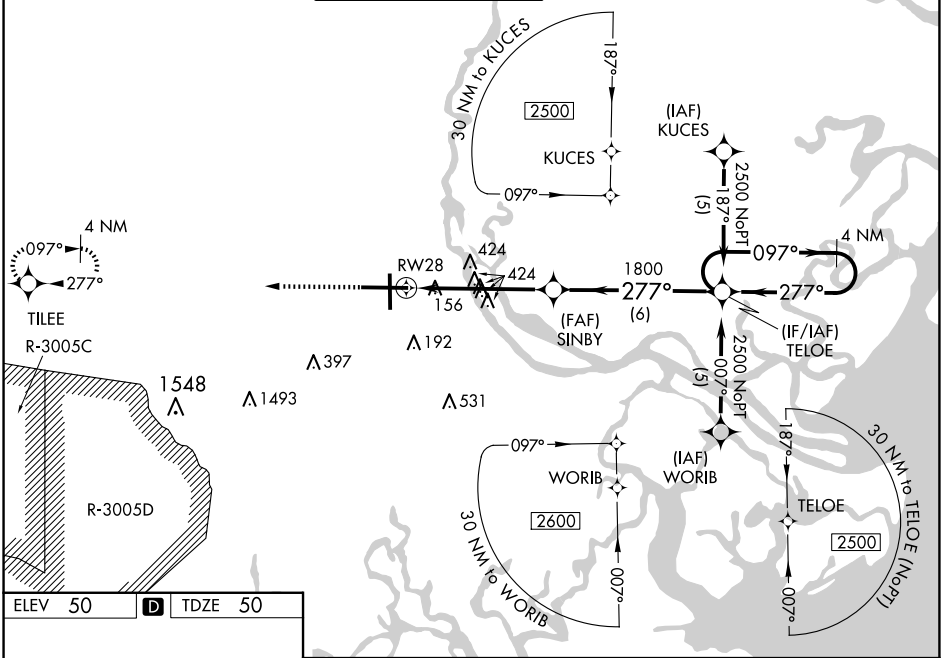

ELEV 50	D	TDZE 50
---------	----------	---------

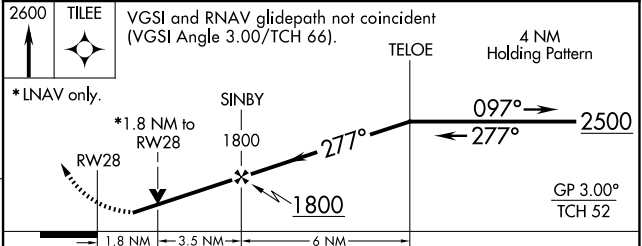

CATEGORY	A	B	C	D
LPV DA	307-1		257 (300-1)	
LNAV/VNAV DA	431-1¼		381 (400-1¼)	
LNAV MDA	680-1	630 (700-1)	680-1¾	630 (700-1¾)
C CIRCLING	680-1	630 (700-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)

SE-4, 20 MAR 2025 to 17 APR 2025

SE-4, 20 MAR 2025 to 17 APR 2025