


# WELLY THREE DEPARTURE (RNAV)

SE-3, 20 MAR 2025 to 17 APR 2025

RNAV 1-DME/DME/IRU or GPS.  
RADAR required.

**TOP ALTITUDE:**  
RWY 10L/28R: 4000  
RWY 14/32: 1500

- D-ATIS 123.75
- CLNC DEL 121.6 284.6
- CPDIC
- GND CON 121.9 284.6
- PALM BEACH TOWER 119.1 257.8
- PALM BEACH DEP CON 127.35 343.6

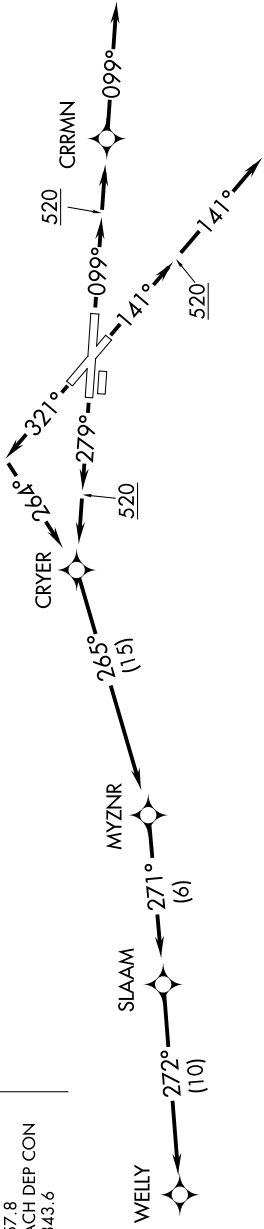

**TAKEOFF MINIMUMS**  
 Rwy 10L, 14, 28R: Standard.  
 Rwy 32: Standard with minimum climb of 500 feet per NM to 520.

NOTE: Jet aircraft only.  
 NOTE: Chart not to scale.

## DEPARTURE ROUTE DESCRIPTION

**TAKEOFF RUNWAY 10L:** Climb on heading 099° to 520, then direct CRRMN, then on heading 099° or as assigned by ATC, for vectors to SLAAM, thence . . . . .  
**TAKEOFF RUNWAY 14:** Climb on heading 141° to 520, then on heading 141° or as assigned by ATC, for vectors to SLAAM, thence . . . . .  
**TAKEOFF RUNWAY 28R:** Climb on heading 279° to 520, then direct CRYER, then on depicted route to SLAAM, thence . . . . .  
**TAKEOFF RUNWAY 32:** Climb on heading 321° to intercept course 264° to CRYER, then on depicted route to SLAAM, thence . . . . .  
 . . . on track 272° to WELLY. Rwy 10L/28R maintain 4000. Rwy 14/32 maintain 1500. Expect filed altitude within 10 minutes after departure.

# WELLY THREE DEPARTURE (RNAV)

SE-3, 20 MAR 2025 to 17 APR 2025