

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>90432</b><br><b>W31A</b> | APP CRS<br><b>306°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5601</b><br><b>583</b><br><b>595</b> |
|--|------------------------|-----------------------------|---|


# RNAV (GPS) RWY 31

SAN MARCOS RGNL (HYI)

**▼** Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility 1/8 mile and LNAV Cat C/D/E and Circling Cat C/D visibility 1/4. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

**MISSED APPROACH:**  
Climb to 3500 direct ORALE and hold.



|                        |                                       |   |                           |                            |  |
|------------------------|---------------------------------------|---|---------------------------|----------------------------|--|
| ATIS<br><b>120.825</b> | AUSTIN APP CON<br><b>119.0 370.85</b> | SAN MARCOS TOWER★<br><b>126.825</b> (CTAF) <b>📻</b> | GND CON<br><b>120.125</b> | CLNC DEL<br><b>120.125</b> | CLNC DEL<br><b>121.35</b><br>(when twr closed) |
|------------------------|---------------------------------------|---|---------------------------|----------------------------|--|

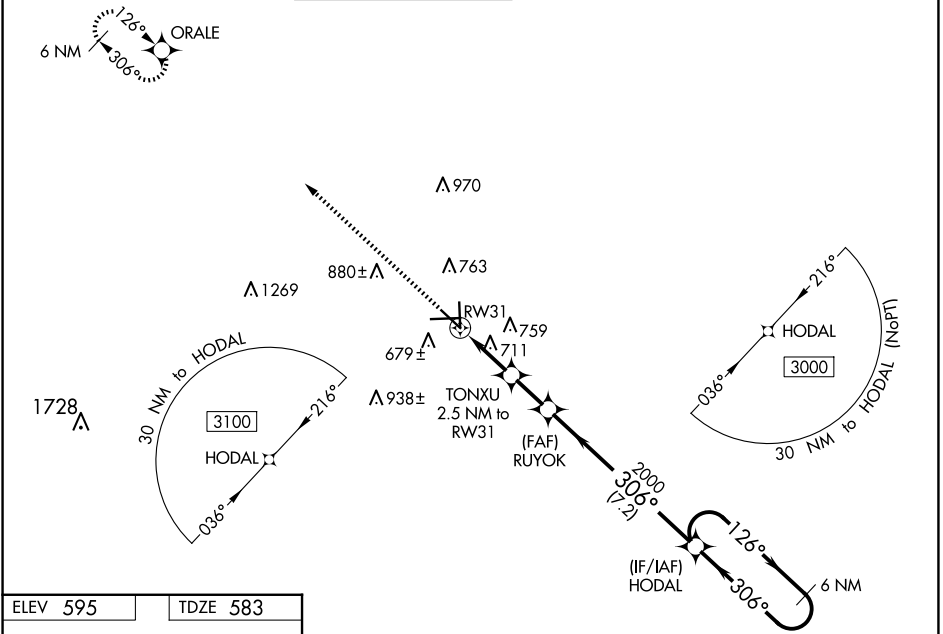

SC-3, 20 MAR 2025 to 17 APR 2025

SC-3, 20 MAR 2025 to 17 APR 2025

|                 |                 |
|-----------------|-----------------|
| ELEV <b>595</b> | TDZE <b>583</b> |
|-----------------|-----------------|

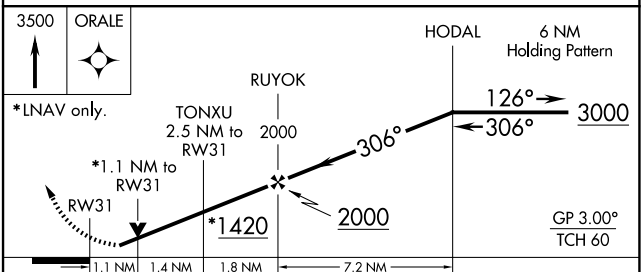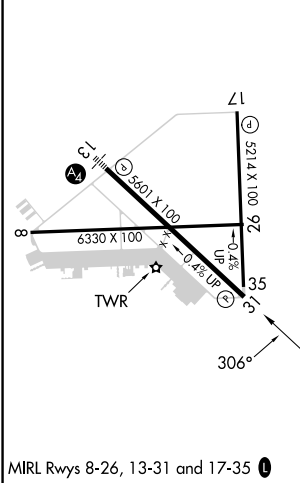

| CATEGORY          | A                     | B                     | C                             | D                             | E                             |
|-------------------|-----------------------|-----------------------|-------------------------------|-------------------------------|-------------------------------|
| LPV DA            | 860-7/8 277 (300-7/8) |                       |                               |                               |                               |
| LNAV/VNAV DA      | 906-1 323 (400-1)     |                       |                               |                               |                               |
| LNAV MDA          | 980-1 397 (400-1)     |                       | 980-1 1/8 397 (400-1 1/8)     |                               |                               |
| <b>📻</b> CIRCLING | 1080-1<br>485 (500-1) | 1120-1<br>525 (600-1) | 1240-1 3/4<br>645 (700-1 3/4) | 1320-2 1/4<br>725 (800-2 1/4) | 1340-2 3/4<br>745 (800-2 3/4) |