


LOC I-SPI 109.5	APP CRS 043°	Rwy Idg TDZE Apt Elev	7927 592 598
---------------------------	------------------------	-----------------------------	---


ILS or LOC RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)

ADF Required.		SPRINGFIELD TOWER ★		GND CON	CLNC DEL	UNICOM		
<p>⚠ When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. For inop ALS when using Lincoln altimeter setting, increase S-LOC 4 Cats C and D visibility to 1¾ SM. ASR *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Lincoln altimeter setting).</p>		<p>ATIS 127.65 270.1</p>		<p>SAINT LOUIS APP CON ★ 126.15 323.0</p>	<p>SPRINGFIELD TOWER ★ 121.3 (CTAF) 257.8</p>	<p>GND CON 121.9 348.6</p>	<p>CLNC DEL 121.7</p>	<p>UNICOM 122.95</p>

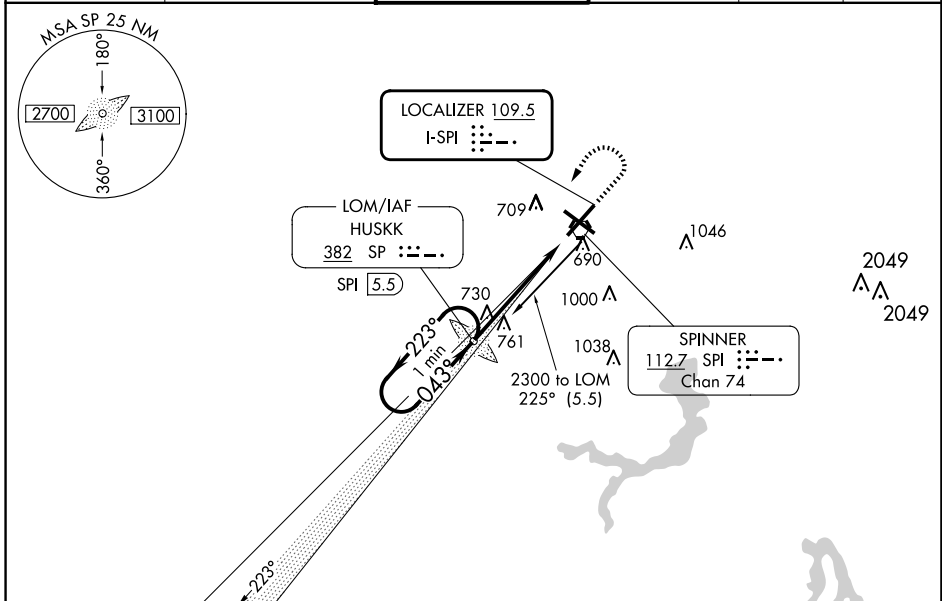

One Minute Holding Pattern	SP LOM SPI 5.5	1500	2300	SP
<p>2300 ← 223°</p> <p>→ 043° 2300</p> <p>GS 3.00° TCH 56</p> <p>2297</p> <p>2300</p> <p>043°</p> <p>5.1 NM</p>				
CATEGORY	A	B	C	D
S-ILS 4	* 792/24 200 (200-½)			
S-LOC 4	1020/24	428 (500-½)	1020/40	428 (500-¾)
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

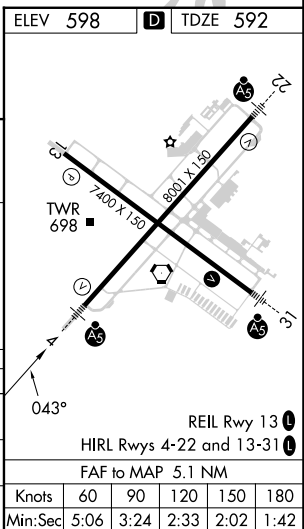

EC-3, 20 MAR 2025 to 17 APR 2025

EC-3, 20 MAR 2025 to 17 APR 2025