LOC/DME I-CER	APP CRS	Rwy Idg	9001
111.15	005°	TDZE	90
Chan 48(Y)		Apt Elev	96

ILS RWY 35R (CAT II & III)

ORLANDO INTL (MCO)

From HAHNA: RNAV 1-DME/DME/IRU or GPS required. Aircraft not DME/DME/IRU or GPS equipped-RADAR required for procedure entry.

Simultaneous approach authorized. Bright lights on highway midway between Rwy 35L and Rwy 35R may be mistaken for runway lights. When using alternate missed approach, simultaneous approach NA.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing right turn to 3000 on ORL VORTAC R-140 to PRESK INT/ ORL 16.2 DME and hold, continue climb-in-hold to 3000.

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON	CLNC DEL	CPDLC
ARR 121.25	124.8 307.0	118.45 253.5 (Rwys 17L-35R,17R-35L)	126.4 (East)	134.7	
DEP 120.525		124.3 253.5 (Rwys 18L-36R,18R-36L)	121.8 (West)	341.7	

ORLANDO 112.2 ORL Chan 59

LOCALIZER 111.15 I-CER Chan 48(Y)

ALTERNATE MISSED APCH FIX

113.7 OCF Chan 84

112.6 OMN Chan 73

R-114

193°

013°

R-193

ZOKUM INT OMN 31.8

ORL R-140

PRESK ORL 16.2

140°

320°

HEWES I-CER 6.2 RADAR

FESHA I-CER 10.6 RADAR

SERAY I-CER 13.9 RADAR

CRUSE I-CER 17.1 RADAR

(IF)

(IAF) HAHNA 6000 210K

005° (4.4) 1600

005° (3.3) 3000

005° (3.2) 4000

324° (6.3) 4000

185°

MSA ORL 25 NM 3000

116.0 LAL Chan 107

R-065

215 353 464 214 346 194 549 1949

ELEV 96 D TDZE 90



HIRL all Rwys
REIL Rwy 36L
TDZ/CL Rwys 17L/R, 18R, 35L/R and 36R

500 3000 ORL R-140 PRESK

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).

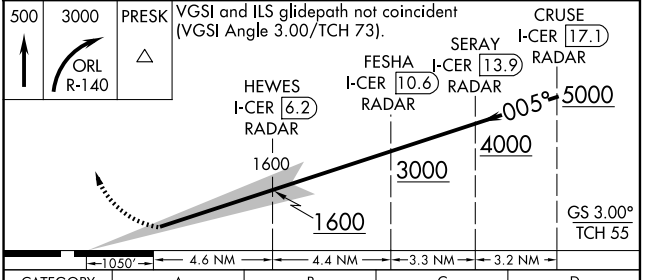

CATEGORY	A	B	C	D
S-ILS 35R	CAT II RA 101/12 100 DA 190			
S-ILS 35R	CAT III RVR 06			

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SE-3, 20 MAR 2025 to 17 APR 2025
SE-3, 20 MAR 2025 to 17 APR 2025