ILS RWY 36R (CAT II & III)

ORLANDO INTL (MCO)

LOC/DME I-OJP	APP CRS	Rwy ldg 11601
110.7	005°	TDZE 92
Chan 44		Apt Elev 96

RADAR required for procedure entry. DME or RADAR required.

Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 on heading 309° and ORL R-248 to DNMOR/ORL 6 DME and hold, continue climb-in-hold to 3000.

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON	CLNC DEL	CPDLC
ARR 121.25 DEP 120.525	124.8 307.0	118.45 253.5 (Rwys 17L-35R,17R-35L) 124.3 253.5 (Rwys 18L-36R,18R-36L)	126.4 (East) 121.8 (West)	134.7 341.7	

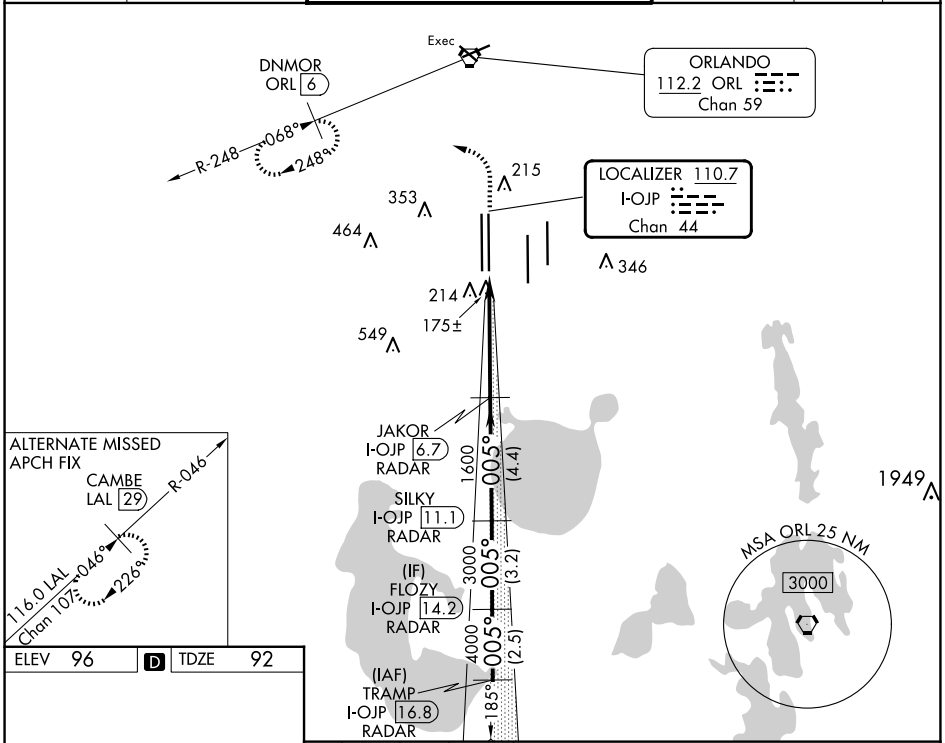

CATEGORY	A	B	C	D
S-ILS 36R	CAT II RA106/12 100 DA 192			
S-ILS 36R	CAT III RVR 06			

HIRL all Rwys
REIL Rwy 36L
TDZ/CL Rwys 17L/R, 18R, 35L/R, and 36R

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SE-3, 20 MAR 2025 to 17 APR 2025

SE-3, 20 MAR 2025 to 17 APR 2025