VOR RWY 36

WITTMAN RGNL (OSH)

VORTAC OSH	APP CRS	Rwy Idg	8002
116.75	360°	TDZE	808
Chan 114 (Y)		Apt Elev	808

Circling to Rwy 5, 23, and 31 NA at night. When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all MDA 40 feet; increase S-36 Cats C/D visibility and, Circling Cat C visibility ⅛ mile, increase Circling Cat D visibility ¼ mile, LAUDE fix minimums increase S-36 Cats C/D visibility to RVR 5500 and Circling Cat D visibility to 2¼ mile. For inop MALSR, when using Fond Du Lac altimeter setting, increase LAUDE fix minimums S-36 Cats C/D visibility to 1⅜ mile. VDP NA with Fond Du Lac altimeter setting.

MALSR

MISSED APPROACH: Climbing right turn to 3000 on OSH VORTAC R-111 to LEWKO INT/ OSH 15.1 DME and hold.

ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) L 290.9	132.3	122.95

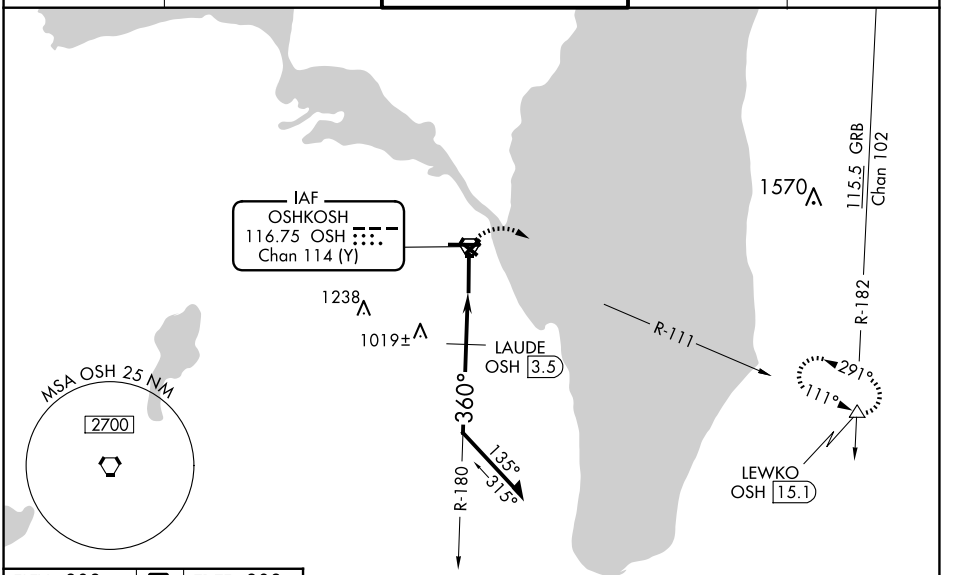

ELEV 808 D TDZE 808

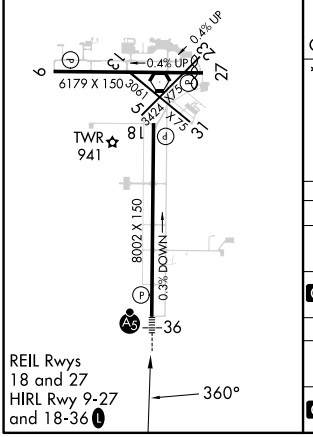

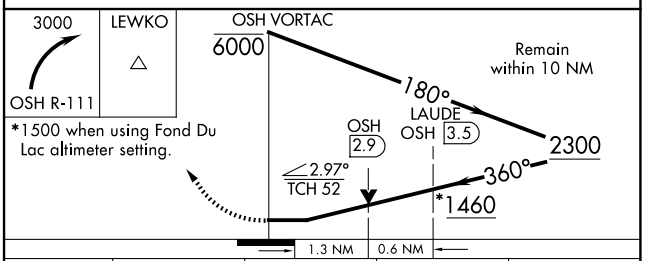

CATEGORY	A	B	C	D
S-36	1460/24 652 (700-½)		1460-1⅜ 652 (700-1⅜)	
C CIRCLING	1460-1 652 (700-1)		1460-1⅞ 652 (700-1⅞)	1460-2 652 (700-2)
	LAUDE FIX MINIMUMS			
S-36	1280/24 472 (500-½)		1280/50 472 (500-1)	
C CIRCLING	1280-1 472 (500-1)	1300-1 492 (500-1)	1360-1½ 552 (600-1½)	1440-2 632 (700-2)

EC-3, 20 MAR 2025 to 17 APR 2025
EC-3, 20 MAR 2025 to 17 APR 2025