

WAAS CH 61105 W03A	APP CRS 030°	Rwy Idg 6801 TDZE 640 Apt Elev 640
--	------------------------	---

RNAV (GPS) RWY 3

CHARLOTTESVILLE-ALBEMARLE (CHO)

RNP APCH.


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.
 ▲ When local altimeter setting not received, use Orange altimeter setting and increase LPV DA to 910, LNAV/VNAV DA to 985, and all MDA 80 feet; increase LNAV/VNAV all Cats visibility 1/8 SM, LNAV Cat C/D visibility 1/4 SM and Circling Cats C/D visibility 1/4 SM.
 Baro-VNAV and VDP NA when using Orange altimeter setting. For Inop ALS, increase LNAV/VNAV all Cats visibility to 3/8 SM and LNAV Cats C/D visibility to 1 SM. For Inop ALS when using Orange altimeter setting, increase LPV all Cats visibility to 3/8 SM, and LNAV/VNAV all Cats visibility to 1 SM.

MALSR




MISSED APPROACH:
 Climb to 2000 then climbing right turn to 4000 direct GVE VORTAC and hold.

ATIS 118.425	POTOMAC APP CON 132.85 323.125	CHARLOTTESVILLE TOWER ★ 124.5 (CTAF) 338.275	GND CON 121.9 338.275	UNICOM 122.95
------------------------	--	--	---------------------------------	-------------------------

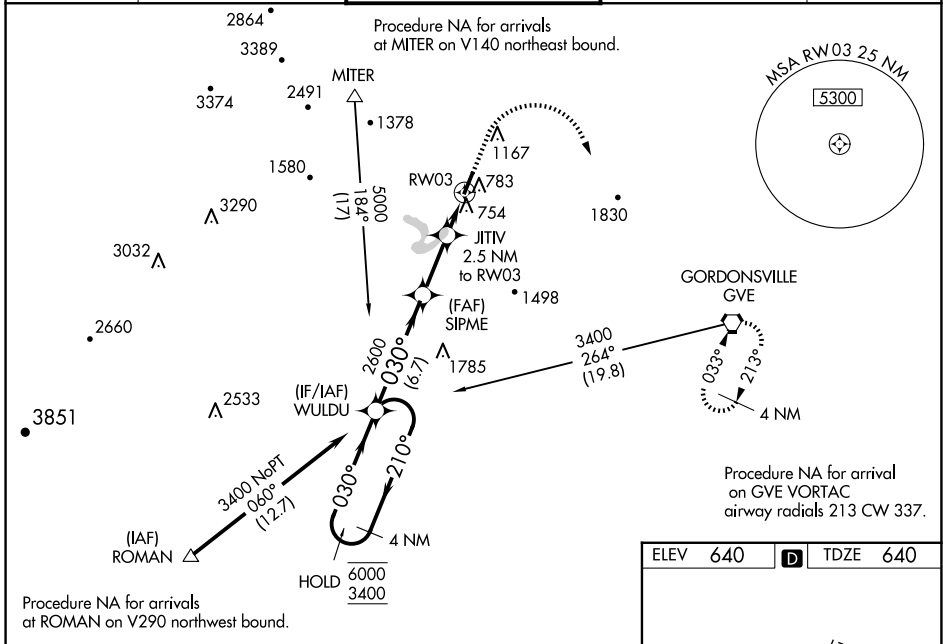

NE-3, 20 MAR 2025 to 17 APR 2025

NE-3, 20 MAR 2025 to 17 APR 2025

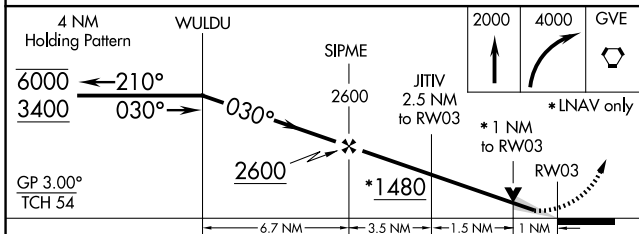

CATEGORY	A	B	C	D
LPV DA	840-1/2		200 (200-1/2)	
LNAV/VNAV DA	915-1/2		275 (300-1/2)	
LNAV MDA	1020-1/2 380 (400-1/2)		1020-5/8 380 (400-5/8)	
CIRCLING	1100-1 460 (500-1)		1500-2 1/2 860 (900-2 1/2) 1500-2 3/4 860 (900-2 3/4)	

