


WAAS CH <b>45503</b> <b>W09A</b>	APP CRS <b>094°</b>	Rwy Idg TDZE <b>66</b> Apt Elev <b>83</b>	<b>8000</b>
--	------------------------	---	-------------

# RNAV (GPS) RWY 9

TALLAHASSEE INTL (TLH)

RNP APCH	<p>▼ Rwy 9 helicopter visibility reduction below RVR 4000 NA. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.</p>	MISSED APPROACH: Climb to 3000 direct FEKAD and hold.
----------	---	---

ATIS <b>119.45 239.25</b>	TALLAHASSEE APP CON * <b>135.8 317.4</b>	TALLAHASSEE TOWER * <b>118.7</b> (CTAF) <b>257.8</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>126.65 275.8</b>	UNICOM <b>123.075</b>
------------------------------	---	---	-------------------------------	---------------------------------	--------------------------

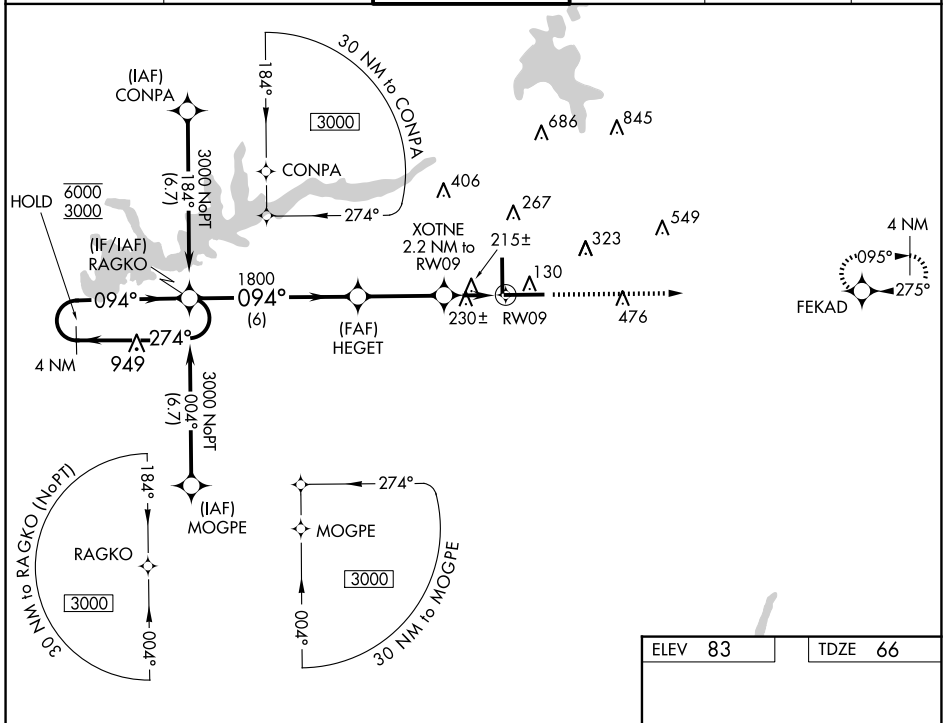

SE-3, 20 MAR 2025 to 17 APR 2025

SE-3, 20 MAR 2025 to 17 APR 2025

ELEV 83	TDZE 66
---------	---------

3000	FEKAD
------	-------

\*LNAV only.

8000 X 150  
0.4% UP - 7000 X 150  
0.3% UP  
36  
TWR 203  
094°

TDZ/CL Rwy 27  
REIL Rwy 9 and 18  
HIRL Rwy 9-27 and 18-36

CATEGORY	A	B	C	D
LPV DA		401/60	335 (400-1¼)	
LNAV/VNAV DA		447-1¼	381 (400-1¼)	
LNAV MDA	480/55	414 (400-1)	480/60	414 (400-1¼)
CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)