WAAS CH 82635 W36A	APP CRS 003°	Rwy Idg 2690 / TDZE 905 / Apt Elev 906

RNAV (GPS) RWY 36
FLYING CLOUD (FCM)

RNP APCH.

Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Minneapolis St Paul Intl/Wold-Chamberlain altimeter setting and increase all MDA 40 feet and increase LP and LNAV Cat C visibility ⅛ mile. Straight-in Rwy 36 at night, and Circling Rwy 18, 36 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct OCEWA and hold.

ATIS	MINNEAPOLIS APP CON	FLYING CLOUD TOWER ★	GND CON	CLNC DEL	UNICOM
124.9	134.7 284.7	119.15 (CTAF) L	121.7	121.7 (When twr closed)	122.95

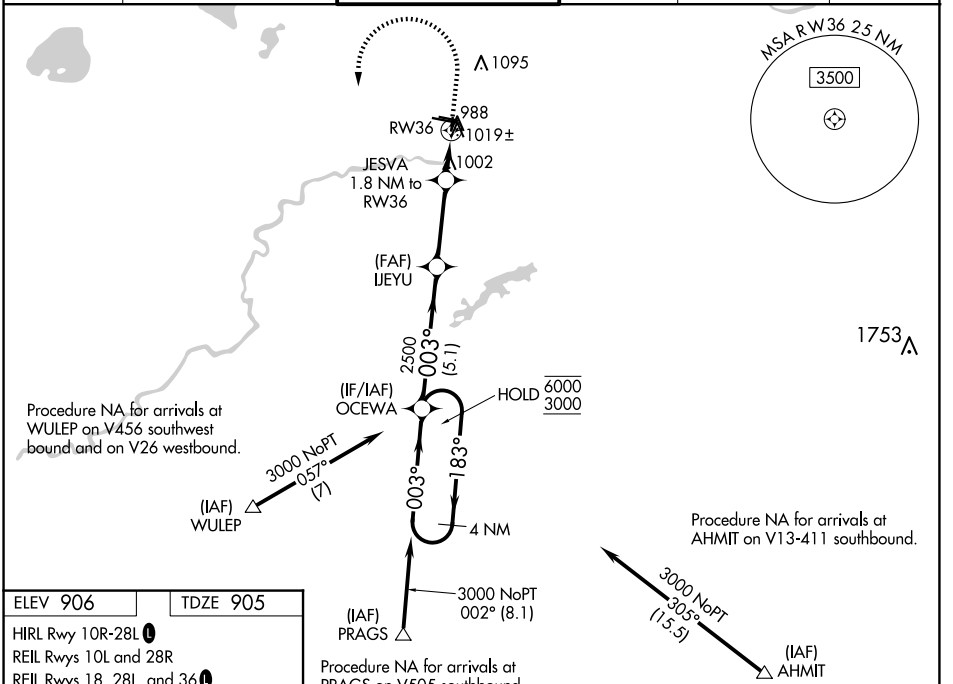

ELEV 906 | TDZE 905

HIRL Rwy 10R-28L L
REIL Rwys 10L and 28R
REIL Rwys 18, 28L, and 36 L
MIRL Rwy 10L-28R
MIRL Rwy 18-36 L



Visual Segment-Obstacles.

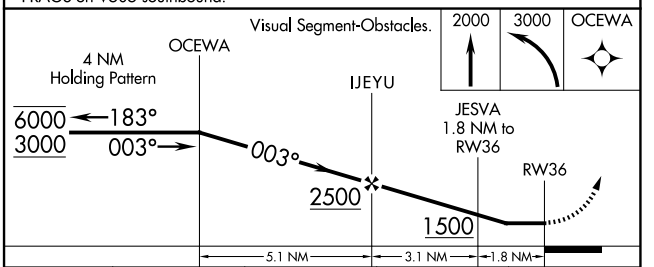

CATEGORY	A	B	C	D
LP MDA	1260-1 355 (400-1)			NA
LNAV MDA	1280-1 375 (400-1)			NA
C CIRCLING	1320-1 414 (500-1)	1440-1 534 (600-1)	1440-1½ 534 (600-1½)	NA

NC-1, 20 MAR 2025 to 17 APR 2025
NC-1, 20 MAR 2025 to 17 APR 2025