


# CARYN SEVEN DEPARTURE (RNAV)

CHICAGO DEP CON  
 133.5 349.0  
 ATIS  
 132.075  
 GND CON  
 121.8  
 DUPAGE TOWER  
 120.9 257.8



**TOP ALTITUDE:**  
**3000**



NOTE: Turbojet departures maintain 250K until advised by ATC.

### TAKEOFF MINIMUMS:

Rwys 2L/R, 10, 20L/R, 28, 33: Standard.  
 Rwy 15: 300-1<sup>3</sup>/<sub>8</sub> or standard with minimum climb of 205' per NM to 1000.

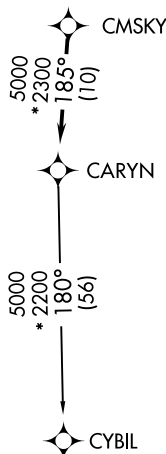

NOTE: Chart not to scale.

RNAV 1 - DME/DME/IRU or GPS.

RADAR required.  
 RADAR required for non-GPS equipped aircraft.

### DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RUNWAYS 2L/R:** Climb on heading 015° to 1260, then as assigned by ATC, for vectors to CMSKY, thence....
- TAKEOFF RUNWAY 10:** Climb on heading 097° to 1260, then as assigned by ATC, for vectors to CMSKY, thence....
- TAKEOFF RUNWAY 15:** Climb on heading 149° to 1260, then as assigned by ATC, for vectors to CMSKY, thence....
- TAKEOFF RUNWAYS 20L/R:** Climb on heading 195° to 1260, then as assigned by ATC, for vectors to CMSKY, thence....
- TAKEOFF RUNWAY 28:** Climb on heading 195° to 1260, then as assigned by ATC, for vectors to CMSKY, thence....
- TAKEOFF RUNWAY 277°:** Climb on heading 277° to 1260, then as assigned by ATC, for vectors to CMSKY, thence....
- TAKEOFF RUNWAY 33:** Climb on heading 329° to 1260, then as assigned by ATC, for vectors to CMSKY, thence....

....on track 185° to CARYN, then on (transition), maintain 3000.  
 Expect filed altitude 10 minutes after departure.

**CYBIL TRANSITION (CARYN7.CYBIL):**