







|   |                        |   |
|---|------------------------|---|
| LOC/DME I-HUX<br><b>111.1</b><br>Chan <b>48</b> | APP CRS<br><b>348°</b> | Rwy Idg <b>8598</b><br>TDZE <b>24</b><br>Apt Elev <b>27</b> |
|---|------------------------|---|

# ILS or LOC RWY 35L


SACRAMENTO INTL (SMF)

|               |  |                   |   |
|---------------|--|-------------------|---|
| DME required. | <p>⚠ Circling NA east of Rwy 17R-35L. Autopilot coupled approach NA below 312 MSL. For inop ALS, increase S-LOC 35L Cats C/D visibility to RVR 4500.<br/>*RVR 1800 authorized with the use of FD or AP or HUD to DA.</p> | <p>MALSR<br/></p> | <p>MISSED APPROACH: Climb to 500 then climbing left turn to 2000 on heading 320° and SAC VORTAC R-329 to GRIME INT/SAC 35.2 DME and hold.</p> |
|---------------|--|-------------------|---|

|                         |   |                                     |                               |                                |       |
|-------------------------|---|-------------------------------------|-------------------------------|--------------------------------|-------|
| D-ATIS<br><b>126.75</b> | NORCAL APP CON<br><b>125.4 259.1</b> (W-NE) <b>125.25 257.9</b> (SW)<br><b>127.4 317.5</b> (E-SE) | CAPITOL TOWER<br><b>125.7 256.7</b> | GND CON<br><b>121.7 256.7</b> | CLNC DEL<br><b>121.1 256.7</b> | CPDLC |
|-------------------------|---|-------------------------------------|-------------------------------|--------------------------------|-------|

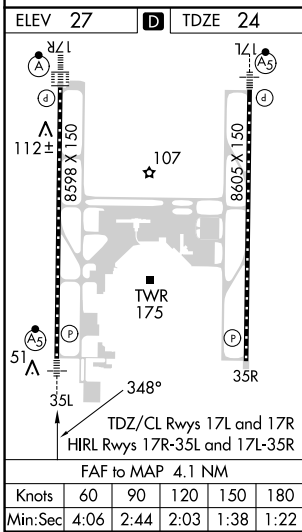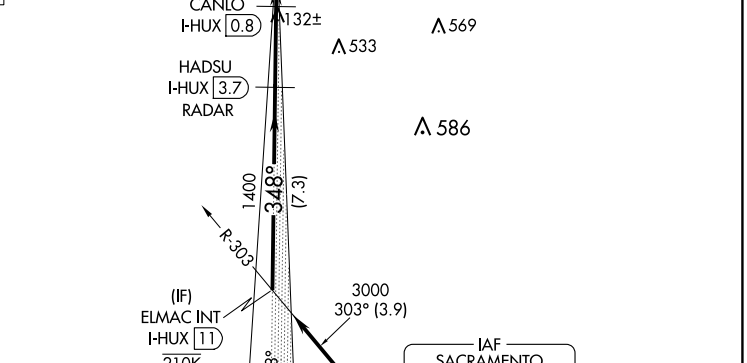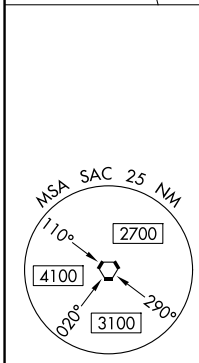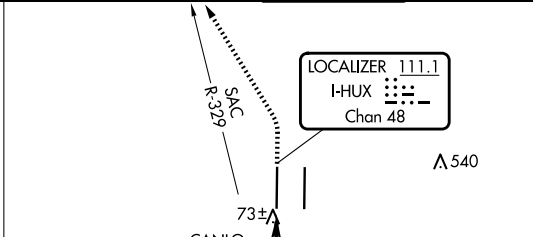

Procedure NA for arrivals on SAC VORTAC airway radials 257 CW 329.

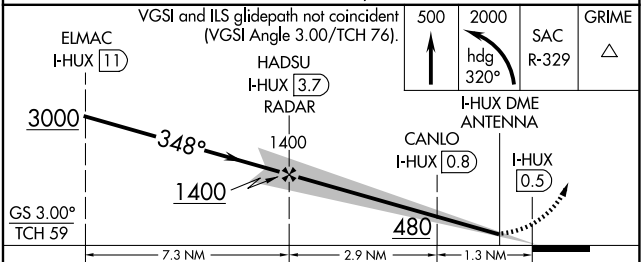

| CATEGORY                                     | A                    | B                    | C                            | D                    |
|--|----------------------|----------------------|------------------------------|----------------------|
| S-ILS 35L*                                   | 224/24               |                      | 200 (200-1/2)                |                      |
| S-LOC 35L                                    | 340/24               |                      | 316 (400-1/2)                |                      |
| <input checked="" type="checkbox"/> CIRCLING | 440-1<br>413 (500-1) | 480-1<br>453 (500-1) | 480-1 1/2<br>453 (500-1 1/2) | 580-2<br>553 (600-2) |

SW-2, 20 MAR 2025 to 17 APR 2025

SW-2, 20 MAR 2025 to 17 APR 2025