

WAAS CH <b>99313</b> <b>W19A</b>	APP CRS <b>190°</b>	Rwy Idg TDZE Apt Elev	<b>6604</b> <b>91</b> <b>91</b>
--	------------------------	-----------------------------	---------------------------------------


# RNAV (GPS) RWY 19

H L SONNY CALLAHAN (CQF)

**⚠** Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).  
**⚠** DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 383 feet, LNAV/VNAV DA to 555 feet and all MDA 60 feet; increase LNAV and Circling Cats C/D visibility ¼ SM.



**MISSED APPROACH:** Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

AWOS-3PT <b>118.425</b>	MOBILE APP CON ★ <b>118.5 269.3</b>	UNICOM <b>123.0 (CTAF) 0</b>
----------------------------	--	---------------------------------

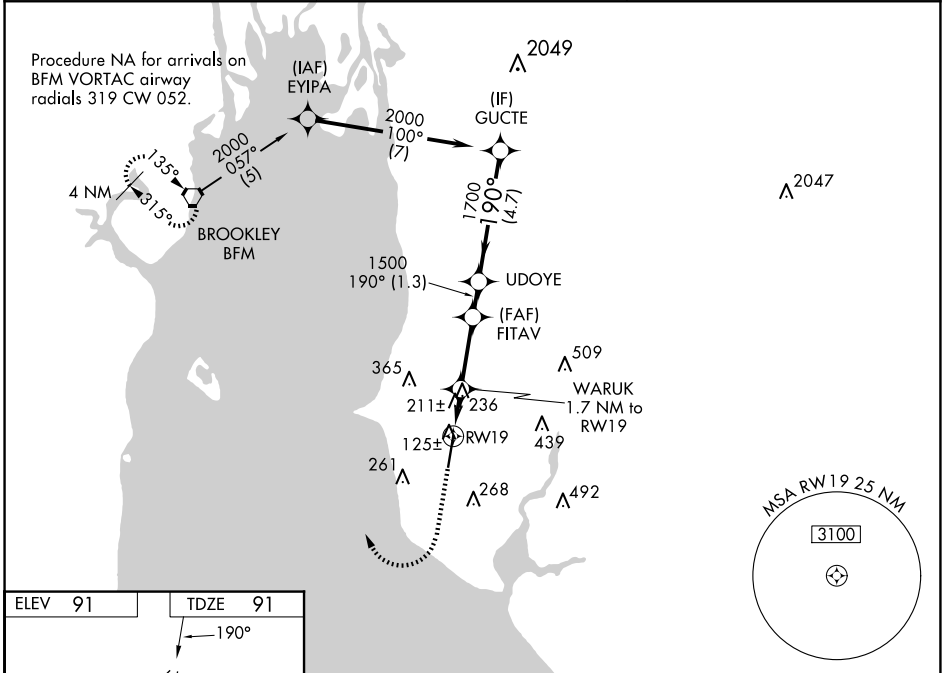

SE-4, 20 MAR 2025 to 17 APR 2025

SE-4, 20 MAR 2025 to 17 APR 2025

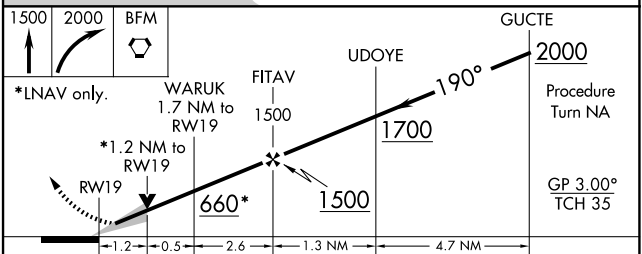

CATEGORY	A	B	C	D
LPV DA		341-7/8	250 (300-7/8)	
LNAV/VNAV DA		513-1 1/2	422 (500-1 1/2)	
LNAV MDA	500-1	409 (500-1)	500-1 1/8	409 (500-1 1/8)
CIRCLING	560-1 469 (500-1)	580-1 489 (500-1)	720-1 3/4 629 (700-1 3/4)	740-2 649 (700-2)