

WAAS CH 53636 W04A	APP CRS 038°	Rwy Idg TDZE Apt Elev	3700 352 354
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

WASILLA (IYS) (PAWS)

RNP APCH


▼

▲

Circling NA to Rwy 4S and 22S. Baro-VNAV and VDP NA when using Palmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Palmer altimeter setting and increase all DA 46 feet, all MDA 60 feet and all visibilities ¼ mile.

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct BGQ VORTAC and hold.

AWOS-3P 135.25	ANCHORAGE APP CON 119.1 363.2	CTAF 122.8
--------------------------	---	----------------------

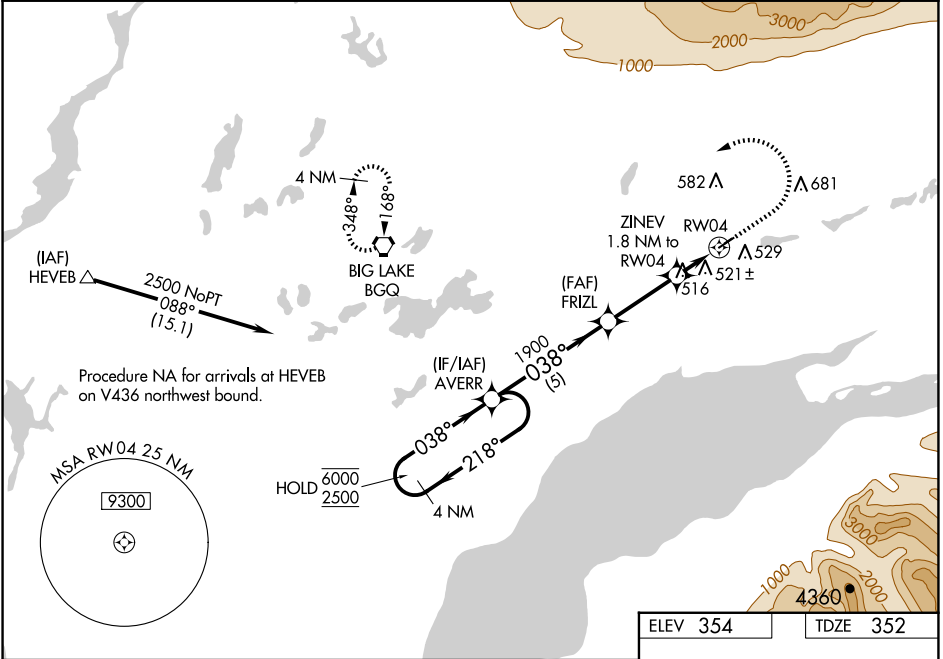

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

1000 3000 BGQ

GP 3.00° TCH 45

5 NM 3 NM 0.5 NM 1.3 NM

CATEGORY A B C D

LPV DA 602-¾ 250 (300-¾) NA

LNAV/VNAV DA 828-1½ 476 (500-1½) NA

LNAV MDA 780-1 428 (500-1) NA

CIRCLING 1000-1 646 (700-1) NA

AVERR

FRIZL

ZINEV 1.8 NM to RWY 04

*1.3 NM to RWY 04

RWY 04

*960

*1900

*038°

*218°

*038°

*038° to RWY 04

MIRL Rwy 4-22

REIL Rwy 4 and 22