

D-ATIS 120.45
CLNC DEL
127.5
GND CON
121.7 348.6
ALBANY TOWER
119.5 257.8

TOP ALTITUDE:
4000

TAKEOFF MINIMUMS:
Rwy 1: Standard.
Rwy 10: Standard with minimum
climb of 365' per NM to 1300.
Rwy 19: Standard with minimum
climb of 400' per NM to 1100.
Rwy 28: Standard with minimum
climb of 471' per NM to 900.

SYRACUSE
117.0 SYR
Chan 117


BURLINGTON
117.5 BTV
Chan 122

GARDNER
116.95 GDM
Chan 116 (Y)

ALBANY
115.3 ALB
Chan 100

DELANCEY
112.1 DNY
Chan 58

PAWLING
114.3 PWL
Chan 90

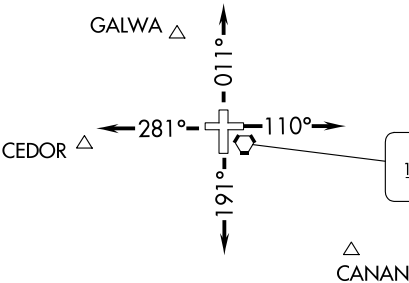

NOTE: RADAR required.
NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 1: Climb heading 011°, thence....
TAKEOFF RWY 10: Climb heading 110°, thence....
TAKEOFF RWY 19: Climb heading 191°, thence....
TAKEOFF RWY 28: Climb heading 281°, thence....

.... on RADAR vectors to assigned route/fix. Maintain 4000. Expect clearance to requested altitude/flight level 10 minutes after departure. Turbojets filed over ACOVE, ARNII, DBABE, JEFFE, PAYGE, SYR, SAX, JFK, CMK, PWL, IGN, requesting flight levels, expect a vector to the vicinity of the ALB, R-343/25 DME (or GALWA) expect on course leaving 14000.

NE-2, 17 APR 2025 to 15 MAY 2025

NE-2, 17 APR 2025 to 15 MAY 2025