




LOC/DME I-PKU 111.75 Chan 54(Y)	APP CRS 275°	Rwy ldg TDZE 998 Apt Elev 1026
---	------------------------	--

ILS or LOC RWY 28
HARTSFIELD/JACKSON ATLANTA INTL (ATL)

RNAV 1-GPS or RADAR required for procedure entry. From TERII: RNAV 1-GPS required. DME or RADAR required.	ALSIF-2	MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 on heading 216° and LGC VORTAC R-062 to PAJVO/LGC 28 DME/RADAR and hold.
Simultaneous approach authorized.		


D-ATIS ARR 119.65	ATLANTA APP CON	ATLANTA TOWER	ALL RWYS	GND CON	ALL RWYS
DEP 125.55	127.9 379.9	8L-26R 8R-26L 9L-27R 9R-27L 10-28 119.1 125.325 123.85 119.3 119.5 254.4	(8L-26R,8R-26L) (9L-27R,9R-27L) 10-28 121.9 121.75 121.65 254.4		

Δ 2049	CLNC DEL 118.1	CPDLC
---------------	-----------------------------	-------

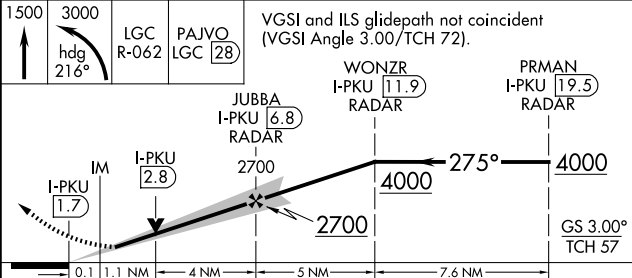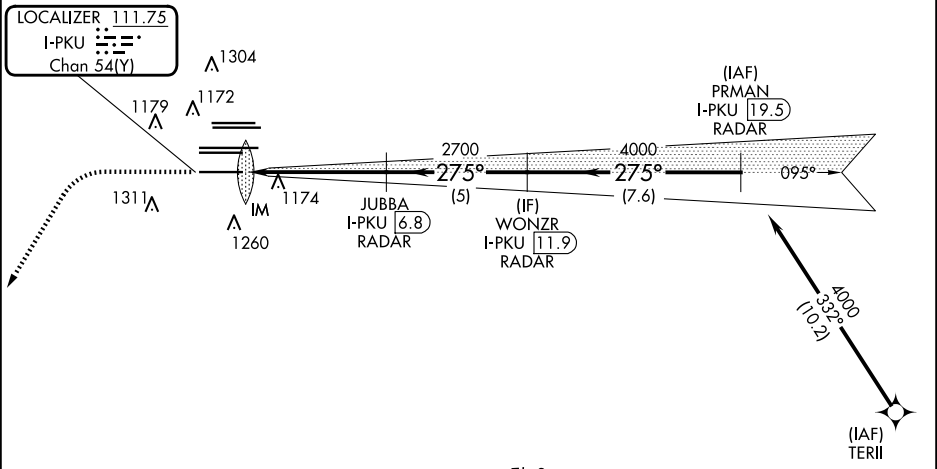

CATEGORY	A	B	C	D
S-ILS 28	1198/18	200 (200-1/2)		
S-LOC 28	1440/24	442 (500-1/2)	1440/45	442 (500-7/8)

ELEV 1026	TDZE 998
-----------	----------



FAF to MAP 5.2 NM	
Knots	60 90 120 150 180
Min:Sec	5:12 3:28 2:36 2:05 1:44