


ILS or LOC RWY 22

LOC I-BIX 109.7	APCH CRS 217°	Rwy Idg THRE Arpt Elev 6630 17 33	[USAF]	KEESLER AFB (KBIX)	
RADAR or DME required.			ALSF-1	† MISSED APPROACH: Climb to 800 tracking 217°, upon reaching 800 turn left to intercept BIX TACAN R-186 climbing to 2200 to 11 DME (RUDLF) and hold.	
▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 ½ miles.			(A1) 		
ATIS 281.55	GULFPORT APP CON 124.6 354.1 (130°- 309°) 127.5 254.25 (310°- 129°)		TOWER ★ 120.75 269.075	GND CON 121.8 275.8	CLNC DEL 121.8 275.8

• 272

† Missed approach requires use of RNAV or ATC RADAR monitoring.
Non-TACAN equipped aircraft expect ATC instructions.

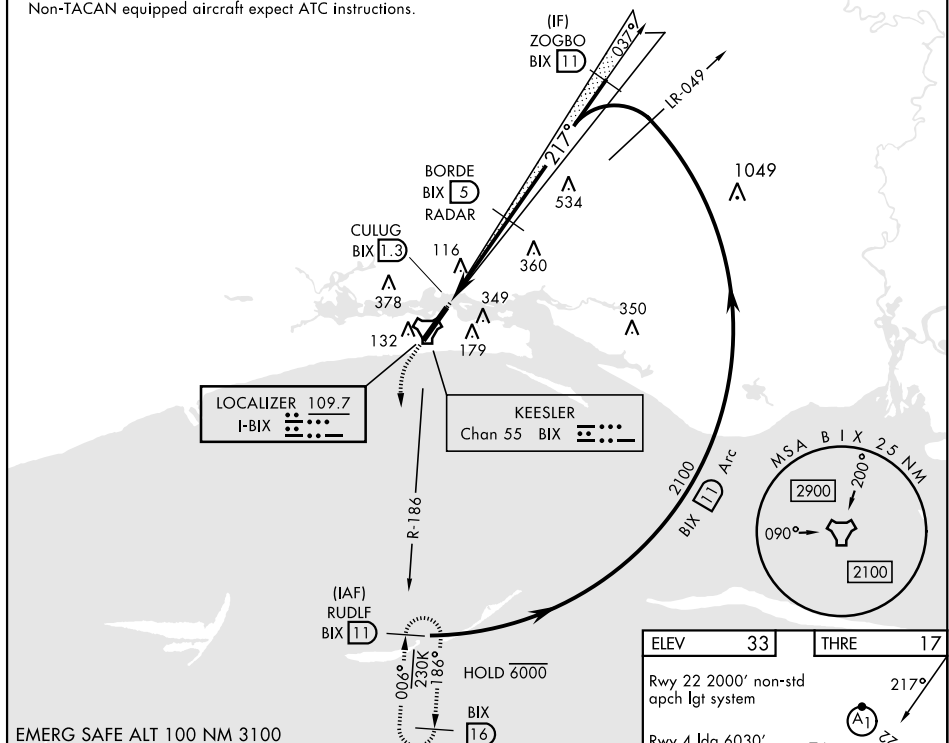

CATEGORY	A	B	C	D
S-ILS 22	217/40	200	(200-¾)	
S-LOC 22*	540/40	523 (600-¾)	540-1¼	523 (600-1¼)
C CIRCLING	580-1 547 (600-1)	660-1 627 (700-1)	680-1¾ 647 (700-1¾)	680-2 647 (700-2)

CIRCLING

Knots	60	90	120	150	180
Min:Sec	3:42	2:28	1:51	1:29	1:14