

TACAN RWY 22

TACAN BIX Chan 55	APCH CRS 222°	Rwy ldg THRE 17 Arpt Elev 33
----------------------	------------------	------------------------------------

[USAF]

KEESLER AFB (KBIX)

✦ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1¼ miles.


ALSF-1

† MISSED APPROACH: Climb to 800 tracking 215°, then turn left to intercept BIX R-186 to 11 DME (RUDLF) climbing to 2200 and hold.


ATIS 281.55	GULFPORT APP CON 124.6 354.1 (130°- 309°) 127.5 254.25 (310°- 129°)	KEESLER TOWER ★ 120.75 269.075	GND CON 121.8 275.8	CLNC DEL 121.8 275.8
----------------	---	-----------------------------------	------------------------	-------------------------

• 272


† Missed Approach requires use of RNAV or ATC RADAR monitoring.

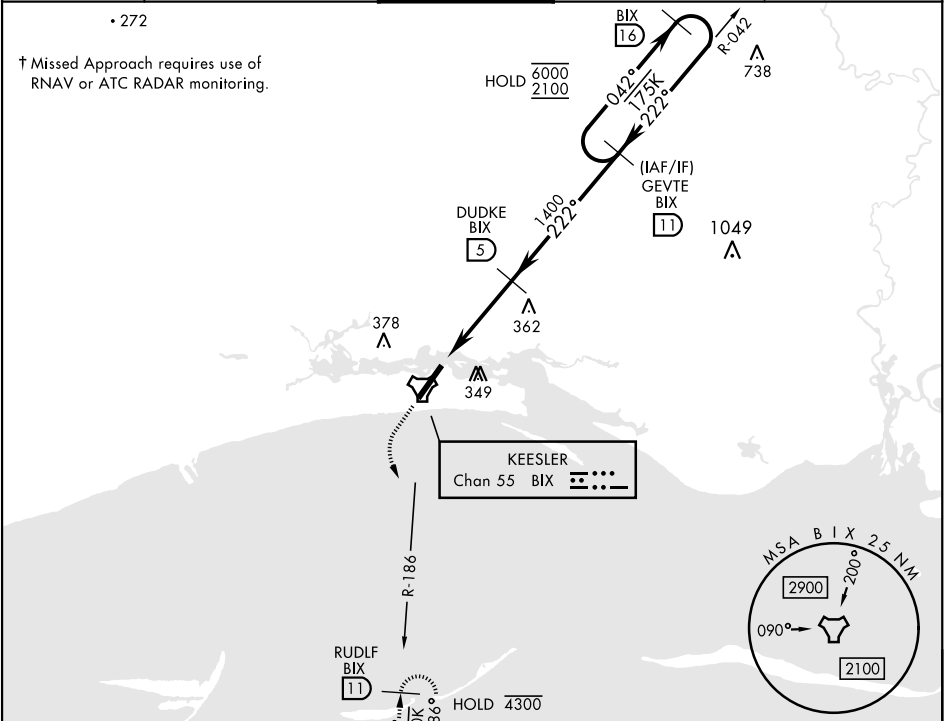

EMERG SAFE ALT 100 NM 3100

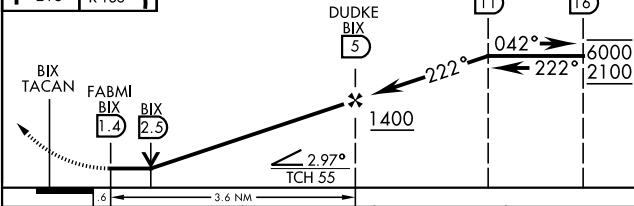

CATEGORY	A	B	C	D
S-22*	620/40 603 (600-¾)	620-1½ 603 (600-1½)	680-1¾ 680-2	647 (700-2)
CIRCLING	587 (600-1)	627 (700-1)	647 (700-1¾)	647 (700-2)

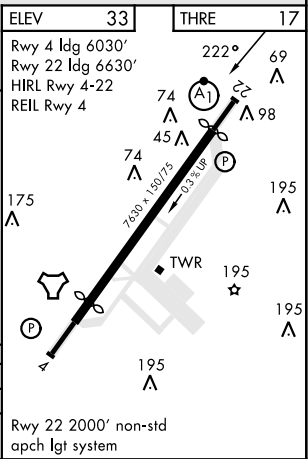

TACAN RWY 22

SC-4, 17 APR 2025 to 15 MAY 2025

SC-4, 17 APR 2025 to 15 MAY 2025