


APP CRS	Rwy Idg	5801
079°	TDZE	727
	Apt Elev	778

RNAV (RNP) Y RWY 8

BOB HOPE (BUR)

RNP AR APCH.	MALSR	MISSED APPROACH: Climb to 1200 then climbing right turn to 4600 direct COTS1 and on track 263° to YOLYY and hold. *Missed approach requires minimum climb of 340 feet per NM to 2400. # Missed approach requires minimum climb of 317 feet per NM to 2400.
For uncompensated Baro-VNAV systems, procedure NA below 1°C or above 54°C. Straight-in Rwy 8 at night, operational VGS1 required, remain on or above VGS1 glidepath until threshold. Inop table does not apply to RNP 0.20* and RNP 0.30. For inop ALS, increase RNP 0.30# all Cats visibility to 1¼ SM.		

D-ATIS	SOCAL APP CON	BURBANK TOWER	GND CON	CLNC DEL	CPDLC
134.5	120.4 360.6 (NORTH) 134.2 338.2 (WEST)	118.7 254.3	123.9 348.6	118.0 348.6	

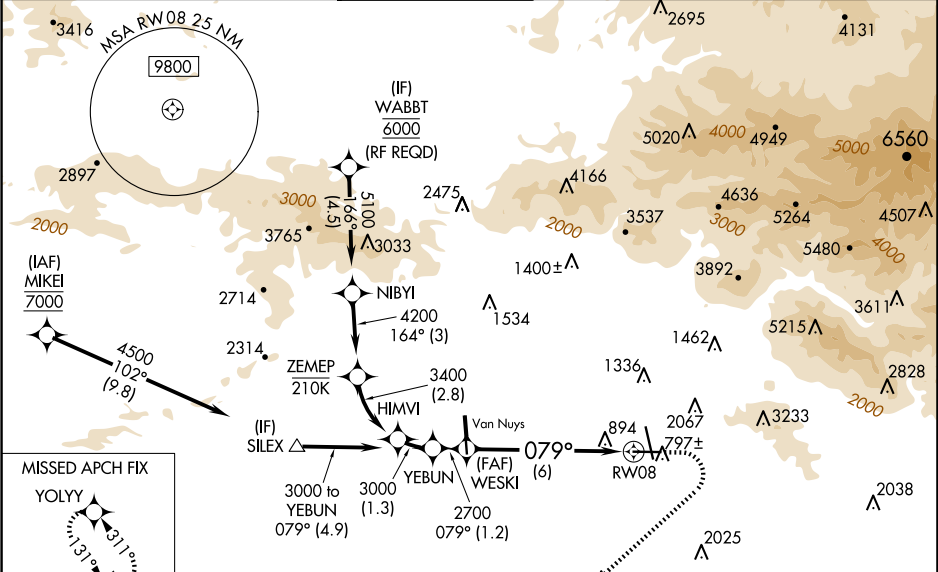

MISSED APCH FIX YOLYY	ELEV 778	TDZE 727
GP 3.00° TCH 60	YEBUN 3000	WESKI 2700
1.2 NM	6 NM	RW08
1200	4600	COTS1
tr	263°	YOLYY
See planview for multiple IF locations.		
CATEGORY	A	B
RNP 0.20 DA*	1068/50	341 (300-1)
RNP 0.30 DA#	1151/50	424 (400-1)
RNP 0.30 DA	1485-2½	758 (800-2½)
AUTHORIZATION REQUIRED		
MIRL Rwy 15-33 HIRL Rwy 8-26 REIL Rwy 15, 26 and 33		