

LOC I-DRI
111.1

APP CRS
355°

Rwy Idg
TDZE **197**
Apt Elev **202**

LOC RWY 36
BEAUREGARD RGNL (DRI)

NA

Inoperative table does not apply. ADF required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDAs 60 feet and S-36 visibility Cat C ½ SM and Circling Cats C/D visibility ¼ SM.



ODALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.

AWOS-3PT
118.225

POLK APP CON
123.7 261.3

UNICOM
122.8 (CTAF)

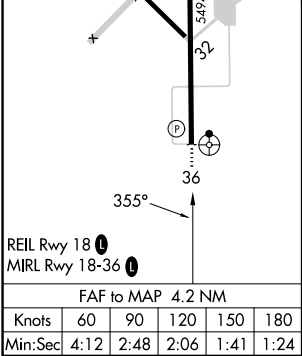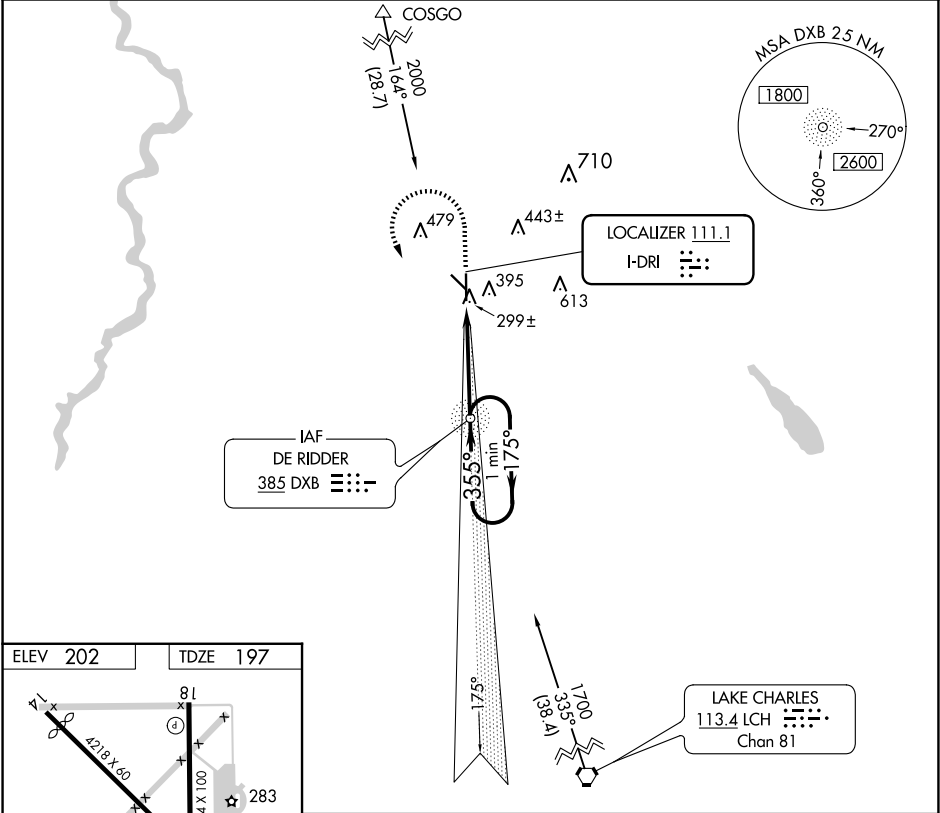

1000 1700 DXB

DXB NDB

One Minute Holding Pattern

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

CATEGORY	A	B	C	D
S-36	560-1 363 (400-1)			560-1¼ 363 (400-1¼)
CIRCLING	720-1 518 (600-1)		780-1½ 578 (600-1½)	1000-2½ 798 (800-2½)

SC-4, 17 APR 2025 to 15 MAY 2025

SC-4, 17 APR 2025 to 15 MAY 2025