

NDB DXB

385

APP CRS

354°

Rwy Idg

5494

TDZE

197

Apt Elev

202

NDB RWY 36

BEAUREGARD RGNL (DRI)

▼



NA

Inoperative table does not apply. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDAs 60 feet and S-36 visibility Cat D ½ SM and Circling Cats C/D ¼ SM.

ODALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.

AWOS-3PT	POLK APP CON	UNICOM
118.225	123.7 261.3	122.8 (CTAF) 0

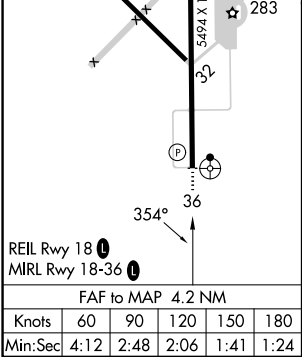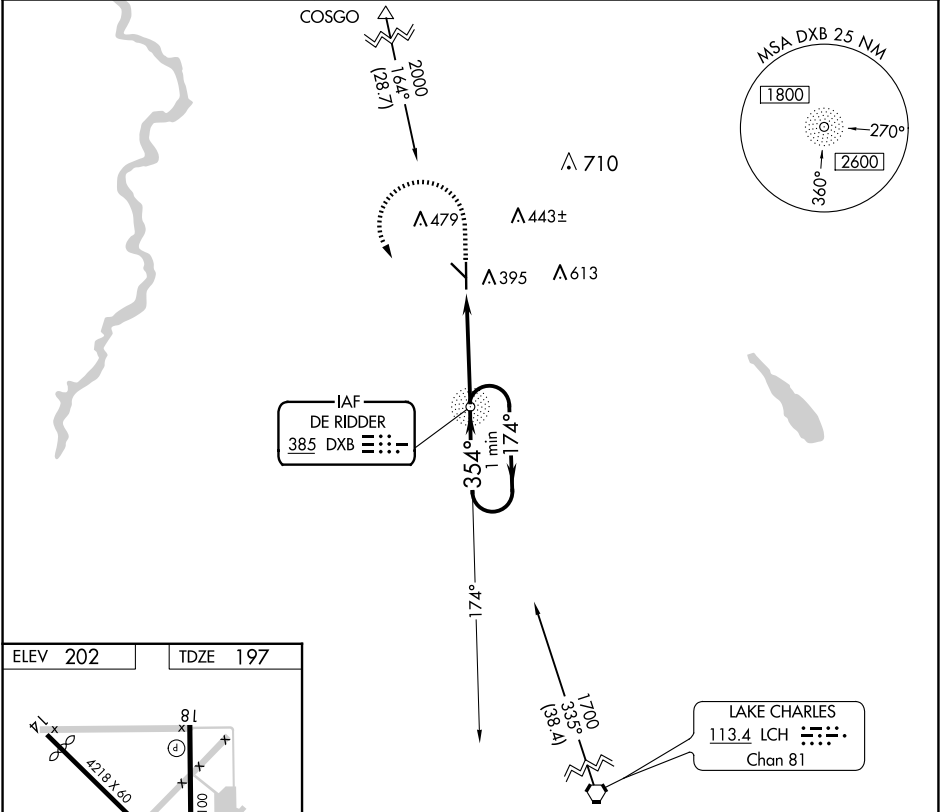

1000	1700	DXB	One Minute Holding Pattern	
		DXB NDB	174° → 1700 ← 354°	
		3.25° TCH 40	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).	
		4.2 NM		
CATEGORY	A	B	C	D
S-36	700-1	503 (500-1)	700-1½	503 (500-1½)
CIRCLING	720-1	518 (600-1)	780-1½ 578 (600-1½)	1000-2½ 798 (800-2½)

SC-4, 17 APR 2025 to 15 MAY 2025

SC-4, 17 APR 2025 to 15 MAY 2025