

APP CRS	Rwy Idg	10001
216°	TDZE	632
	Apt Elev	645

RNAV (RNP) X RWY 21L
DETROIT METRO WAYNE COUNTY (DTW)



RNP AR APCH.

Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.



MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct GAAGE and hold, continue climb-in-hold to 4000.


D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	125.15 284.0	118.4 317.725	121.8 (NW) 132.725 (SW)	119.45 (NE) 119.25 (SE)	120.65

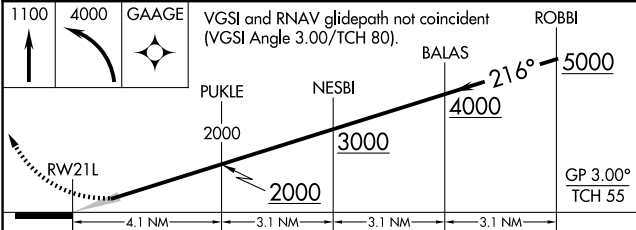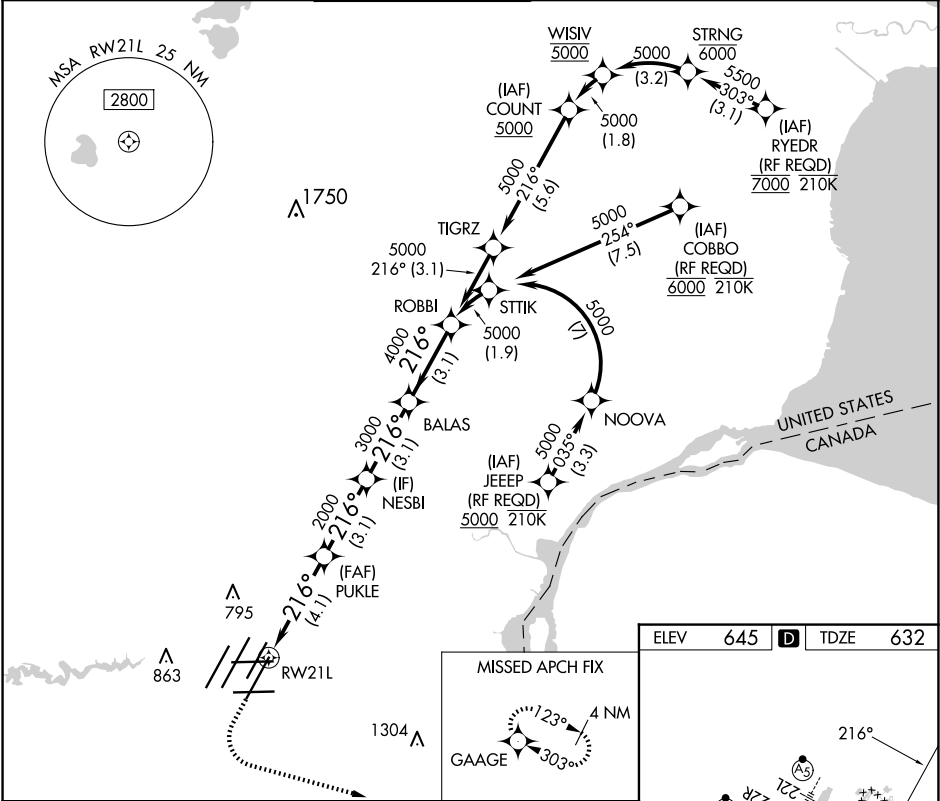

CATEGORY	A	B	C	D
RNP 0.30 DA	1062/40	430 (500-¾)		

AUTHORIZATION REQUIRED

ELEV	645	TDZE	632
------	-----	------	-----

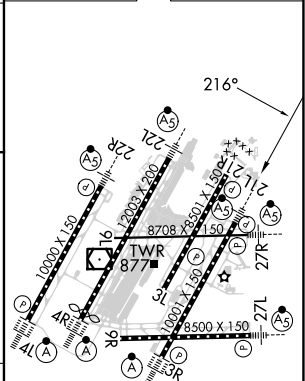

HIRL all runways
REIL Rwy 3L, 9L, 9R, and 21R
TDZ/CL Rwy 3R, 4L, 4R, and 22R