

LOC I-ELM	APP CRS	Rwy ldg	7799
109.1	242°	TDZE	955
		Apt Elev	955

ILS or LOC RWY 24

ELMIRA/CORNING RGNL (ELM)

RADAR required to define ERINN. RNAV 1-GPS required from MAP to UNOLY.

RNAV-1 GPS required for procedure entry. ADF or RADAR required.

MALSR

AS

MISSED APPROACH:
Climb to 4000 direct UNOLY/RADAR and hold.
** Missed approach requires minimum climb of 260 feet per NM to 2400.


⚠ Circling NA for Cat D south of Rwy 10 and 28. Inop table does not apply to S-LOC 24 Cats C/D. Circling NA to Rwy 5 and 23. Circling Rwy 10 NA at night.

⚠ For inop ALS increase S-ILS 24 all Cats visibility to RVR 6000.

⚠ -22°C

****** S-ILS 24 RVR 1800 authorized with use of FD or AP or HUD to DA.

ATIS	ELMIRA APP CON *	ELMIRA TOWER *	GND CON	CLNC DEL	UNICOM
125.475	128.425 257.8	121.1 (CTAF) 0 257.8	121.9	121.9	122.95

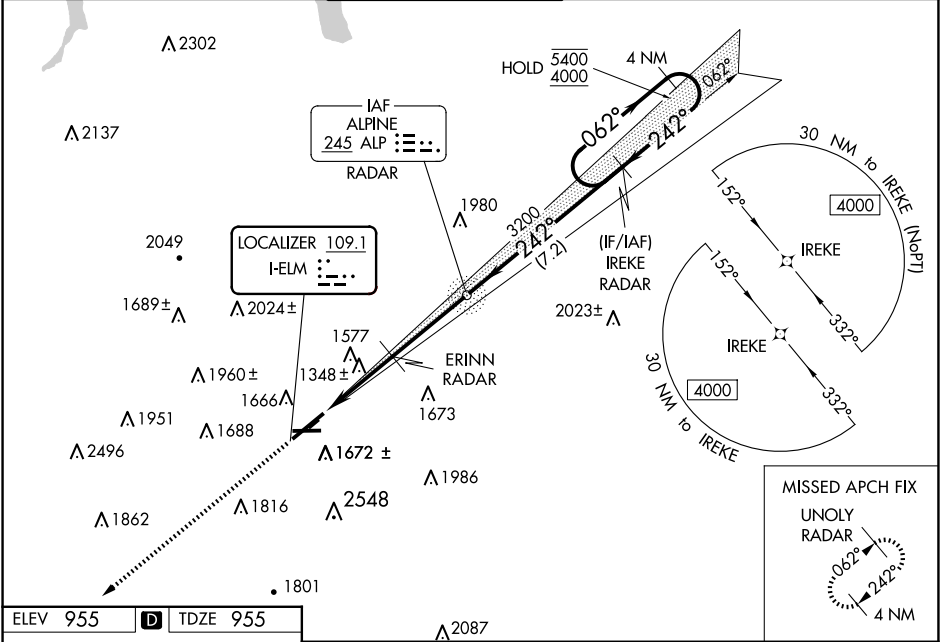

ELEV 955	TDZE 955
* LOC only.	
ERINN RADAR	
ALP NDB RADAR	
IREKE RADAR	
UNOLY RADAR	
4 NM Holding Pattern	
GS 3.00° TCH 53	
3.3 NM	
3.5 NM	
7.2 NM	
C	
D	
CATEGORY	
S-ILS 24 **	
S-ILS 24	
S-LOC 24	
CIRCLING	
ERINN FIX MINIMUMS	
S-LOC 24	
CIRCLING	