



WAAS CH 40223 W26A	APP CRS 265°	Rwy Idg TDZE Apt Elev	9025 3962 3962
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 26L
EL PASO INTL (ELP)

RNP APCH-GPS.		MALSR	MISSED APPROACH: Climb to 4380 then climbing right turn to 7500 direct FABAN and hold.	
▼ ▲ ASR	Circling NA for Cat D west of Rwy 4-22. For inop ALS, increase LP and LNAV Cat A/B visibility to 1 SM, and Cat C/D to 1½ SM.			
D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6	CLNC DEL 125.0 379.1

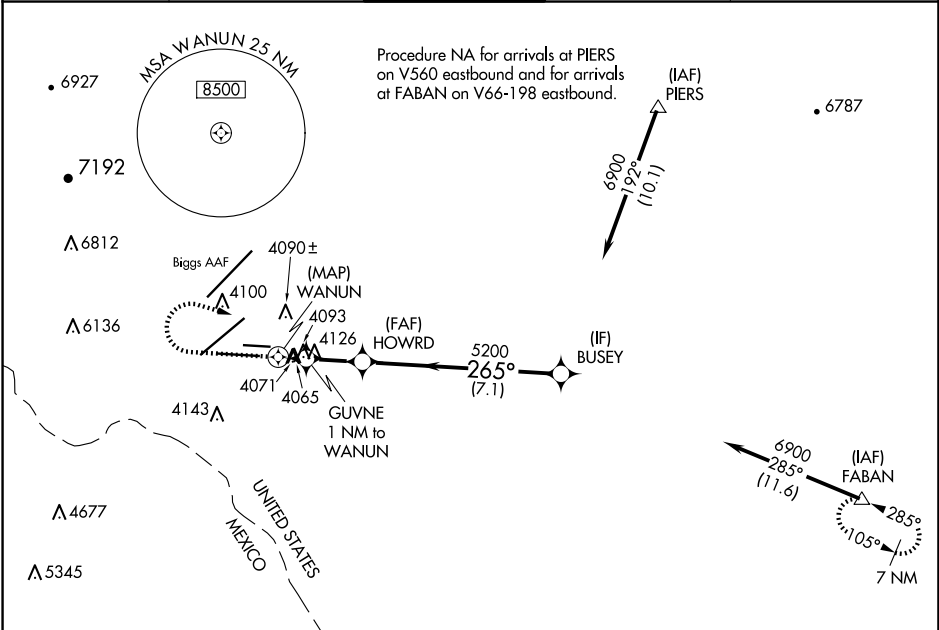

ELEV 3962	D	TDZE 3962
-----------	----------	-----------



4380		7500	FABAN	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 75).	
				BUSEY	
				HOWRD	
				WANUN	
				GUVNE 1 NM to WANUN	
				5200	
				4540	
				265°	
				6900	
				3.00° TCH 55	
				0.7	
				1 NM	
				2 NM	
				7.1 NM	
CATEGORY		A		B	
LP MDA		4380-¾		418 (500-¾)	
LNAV MDA		4380-¾		418 (500-¾)	
CIRCLING		4420-1 458 (500-1)	4440-1 478 (500-1)	4480-1½ 518 (600-1½)	4680-2¼ 718 (800-2¼)

MIRL Rwy 8L-26R
REIL Rwy 4 and 8R
HIRL Rwy 4-22 and 8R-26L