


WAAS CH 42634 W28B	APP CRS 273°	Rwy Idg 10800 TDZE 651 Apt Elev 680
--	------------------------	--

RNAV (GPS) RWY 28C

CHICAGO O'HARE INTL (ORD)

▼ DME/DME RNP-0.3 NA. Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALSF, increase LNAV Cat C and D visibility to RVR 6000.				ALSF-2 	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct DPA VOR/DME and hold.
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 120.75 348.0	GND CON (TWR CENTER) 124.125 (TWR NORTH) 121.75 (OBND) 118.05 (TWR SOUTH) 121.9 (IBND) 226.675 (ALL TWRs)		CLNC DEL 121.6 CPDLC

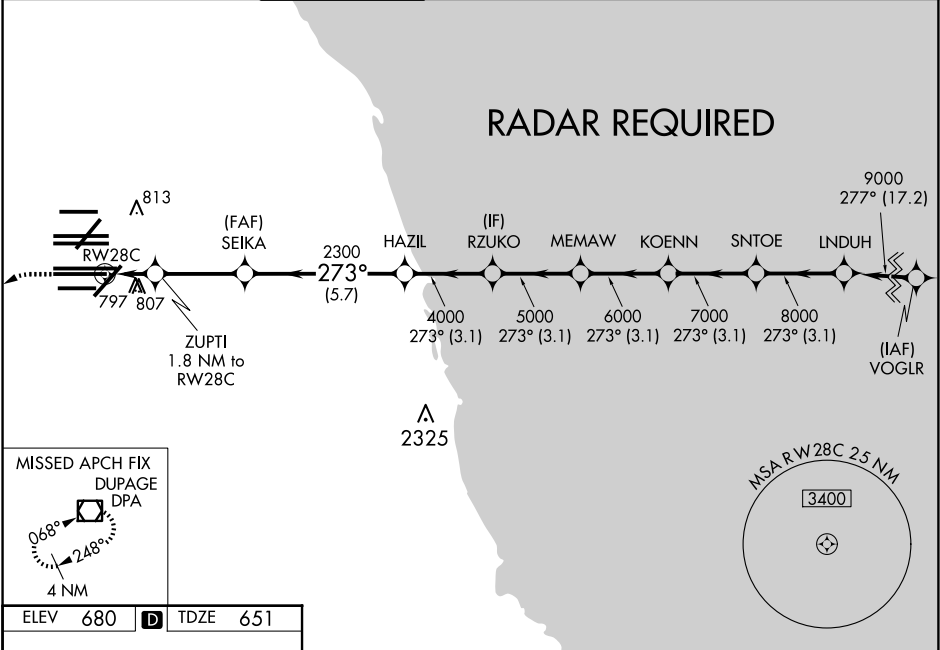

		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 80).	
*LNAV only.			
ZUPTI 1.8 NM to RW28C		SNTOE LNDUH	
*1 NM to RW28C		273° 9000	
RW28C		GP 3.00°	
*1260 2300		TCH 55	
CATEGORY		A B C D	
LPV DA		851/18 200 (200-½)	
LNAV/VNAV DA		1094/50 443 (500-1)	
LNAV MDA		1060/24 409 (400-½) 1060/40 409 (400-¾)	