

WAAS CH 42804 W28A	APP CRS 273°	Rwy Idg 13000 TDZE 651 Apt Elev 680
--	------------------------	--

RNAV (GPS) RWY 28R


CHICAGO O'HARE INTL (ORD)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to 1½ mile and LNAV Cats C/D visibility to RVR 6000. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct DPA VOR/DME and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 132.7 348.0	124.125 GND CON (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	121.75 (TWR CENTER) (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	--	------------------------------------	--	--	--------------------------	-------

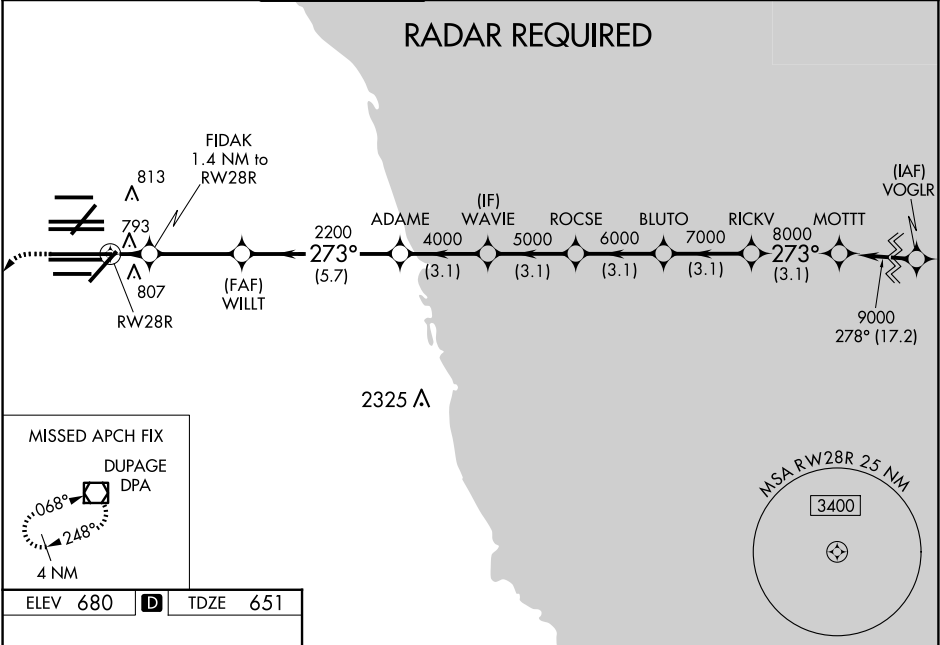

		1200 4000 DPA VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 70).	
*LNAV only.		GP 3.00° TCH 54	
1.4 3.3 NM 5.7 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM		1.4 3.3 NM 5.7 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM	
CATEGORY A		B C D	
LPV DA		851/18 200 (200-½)	
LNAV/VNAV DA		1041/45 390 (400-¾)	
LNAV MDA		1060/24 409 (400-½)	1060/40 409 (400-¾)