

LOC/DME I-CNL	APP CRS	Rwy Idg	7200
111.3	047°	TDZE	260
Chan 50		Apt Elev	266

ILS or LOC RWY 4R


BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

W Rwy 4R helicopter visibility reduction below RVR 4000 NA. Simultaneous approach authorized. For inop ALS, increase S-ILS 4R all Cats visibility to RVR 4500. For inop ALS, increase S-LOC 4R Cats A/B visibility to RVR 5500 and Cats C/D visibility to 1 1/4 SM. OGRAY Fix Minimums: For inop ALS, increase S-LOC 4R Cats A/B visibility to RVR 5500 and Cats C/D to 1 1/2 SM.

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 on heading 110° and LIT VORTAC R-089 to ATERS INT/UIT 16 DME and hold.

D-ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 353.6	118.7 257.8	121.9 339.8	118.95

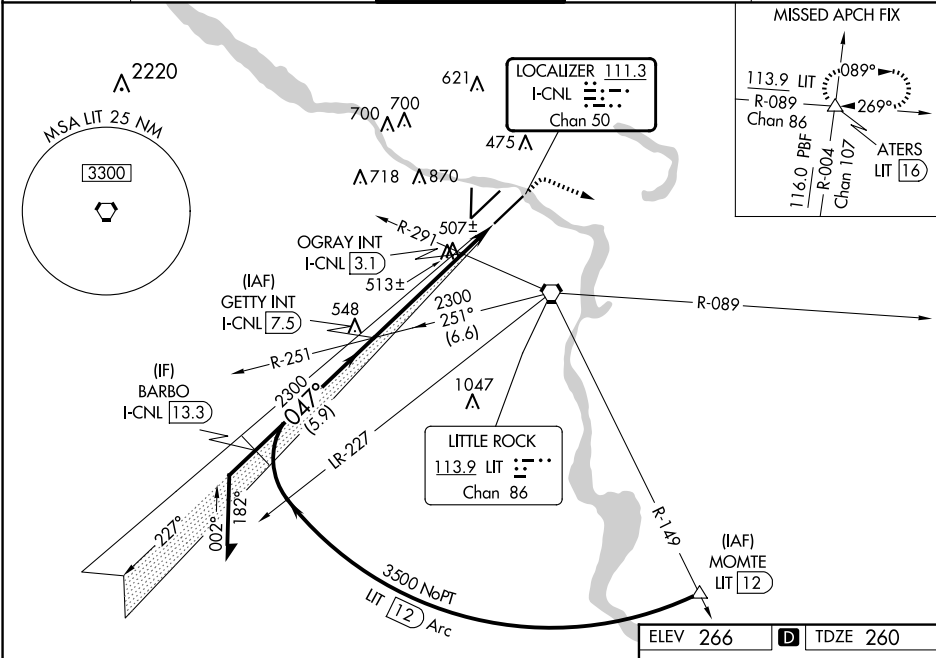

Remain within 10 NM

GETTY INT
I-CNL 7.5

OGRAY INT
I-CNL 3.1

I-CNL 1.3

800 **4000** **LIT R-089** **ATERS**


GS 3.00° TCH 49

2300 **047°**

Use I-CNL DME when on the localizer course.

4.4 NM **1.8 NM**

CATEGORY	A	B	C	D
S-ILS 4R		523/40	263 (300-3/4)	
S-LOC 4R	880/40	620 (700-3/4)	880-1 3/8	620 (700-1 1/2)
CIRCLING	880-1	1000-1	1180-2 3/4	1180-3
	614 (700-1)	734 (800-1)	914 (1000-2 3/4)	914 (1000-3)
OGRAY (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 4R	780/40	520 (600-3/4)	780/55	520 (600-1)
CIRCLING	820-1	1000-1	1180-2 3/4	1180-3
	554 (600-1)	734 (800-1)	914 (1000-2 3/4)	914 (1000-3)

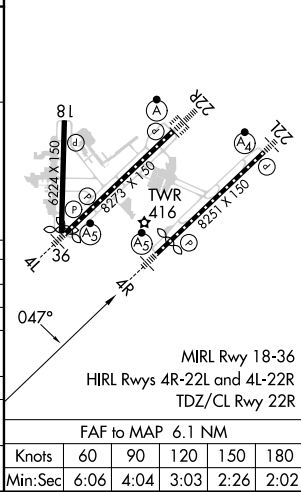

SC-1, 17 APR 2025 to 15 MAY 2025

SC-1, 17 APR 2025 to 15 MAY 2025