


WAAS CH 90411 W04A	APP CRS 046°	Rwy Idg 7976 TDZE 258 Apt Elev 266
--	------------------------	---

RNAV (GPS) RWY 4L

BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 4L helicopter visibility reduction below ¾ SM NA. For inop ALS, increase LNAV Cat A and B visibility to RVR 5000. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.	MALSR 	MISSED APPROACH: Climb to 2900 direct ODXIH and on track 052° to BRAUM and hold.
--	-----------	--

D-ATIS 125.65	LITTLE ROCK APP CON 135.4 353.6	ADAMS TOWER 118.7 257.8	GND CON 121.9 339.8	CLNC DEL 118.95
-------------------------	---	-----------------------------------	-------------------------------	---------------------------

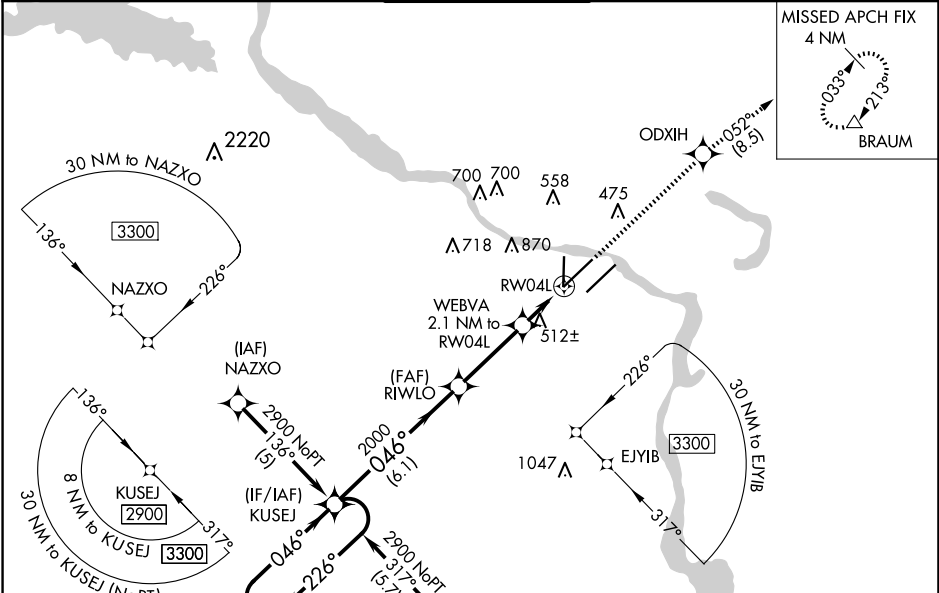

	ELEV 266	D	TDZE 258
4 NM Holding Pattern	KUSEJ	RIWLO	ODXIH
2900	226°	2000	tr 052°
GP 3.00°	046°	046°	BRAUM
TCH 46			*LNAV only.
	6.1 NM	3.2 NM	0.6 NM
			1.5 NM
CATEGORY	A	B	C
LPV DA		544/40	286 (300-¾)
LNAV/VNAV DA		824-1½	566 (600-1½)
LNAV MDA	780/40	522 (600-¾)	780/55 522 (600-1)
CIRCLING	820-1 554 (600-1)	1000-1 734 (800-1)	1180-2¾ 914 (1000-2¾)
			1180-3 914 (1000-3)

