



WAAS CH 56201 W27B	APP CRS 274°	Rwy Idg TDZE 26 Apt Elev 33	9482
--	------------------------	---	-------------

RNAV (GPS) RWY 27L
MELBOURNE ORLANDO INTL (MLB)

RNP APCH - GPS.			MISSED APPROACH: Climb to 2000 direct SUROY and hold.			
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below 2°C or above 54°C.						
ATIS 132.55	ORLANDO APP CON 132.65 281.425	MELBOURNE TOWER ★ 118.2(CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9	CLNC DEL 132.65 (When twr closed)	UNICOM 122.95

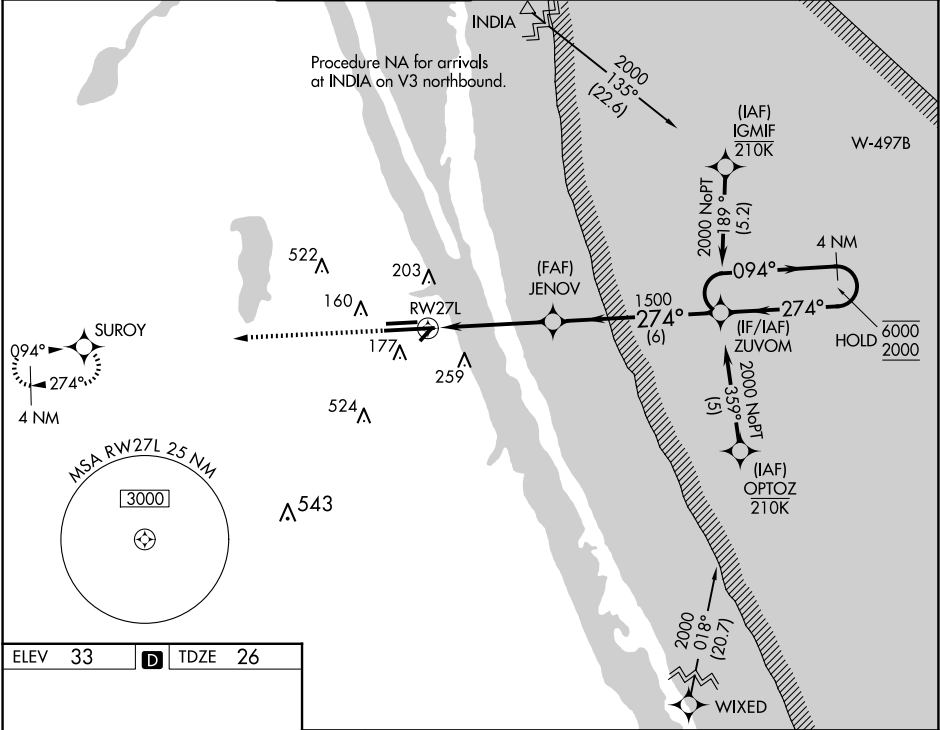

ELEV 33	D	TDZE 26
---------	----------	---------

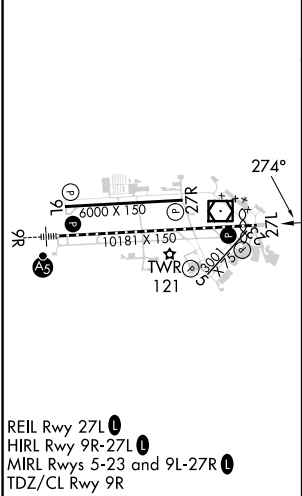

2000

↑

SUROY

✦

JENOV

1500

ZUVOM

4 NM Holding Pattern

1.3 NM to RW27L

1.3 NM

3.2 NM

6 NM

274°

094°

274°

6000

2000

GP 3.00°

TCH 52

CATEGORY	A	B	C	D
LPV DA		226-¾	200 (200-¾)	
LNAV/ VNAV		318-¾	292 (300-¾)	
LNAV MDA	500-1	474 (500-1)	500-1¾	474 (500-1¾)
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)