WAAS CH 42600 W04A	APP CRS 043°	Rwy ldg 5764 TDZE 2634 Apt Elev 2634

RNAV (GPS) RWY 4
FRANK WILEY FLD (MLS)

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Glendive altimeter setting: increase LPV and LNAV/VNAV DA to 3051 and all visibilities 1/8 SM. Increase all MDA 180 feet and LNAV Cat C and D visibilities 5/8 SM and Circling Cat C and D visibilities 1/2 SM. Baro-VNAV and VDP NA when using Glendive altimeter setting.

MISSED APPROACH: Climb to 6000 direct AXUPE and hold, continue climb-in-hold to 6000.

ASOS	SALT LAKE CENTER	UNICOM
135.575	126.85 305.2	123.0 (CTAF) L

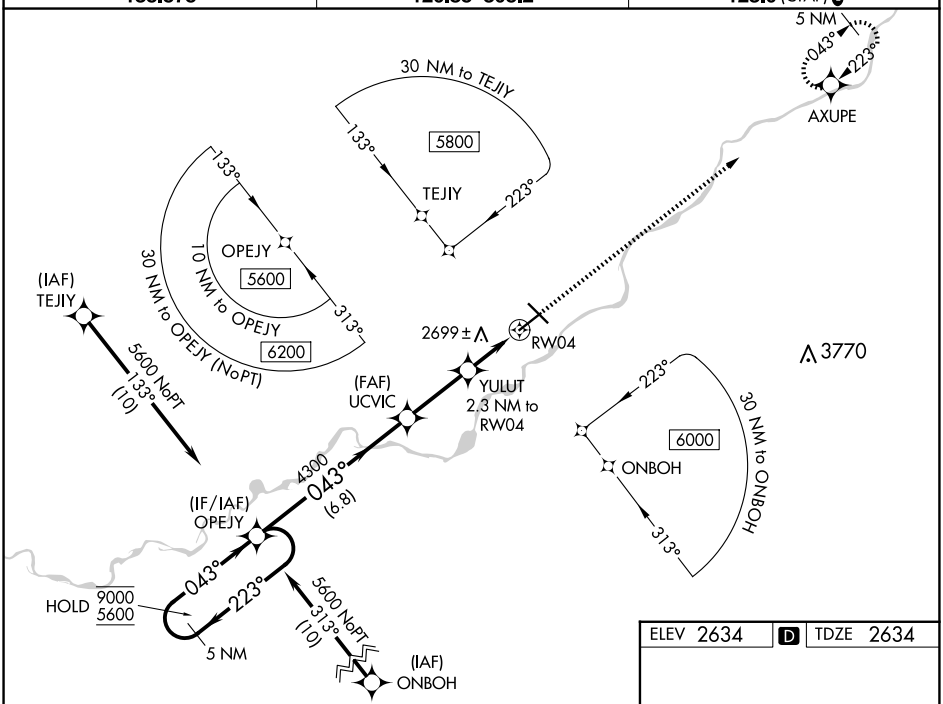

ELEV 2634 D TDZE 2634

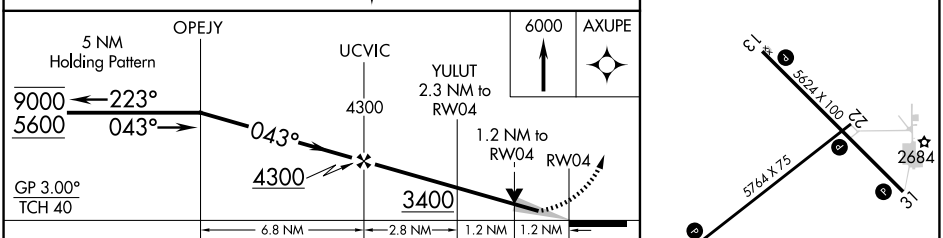

CATEGORY	A	B	C	D
LPV DA	2884-1 250 (300-1)			
LNAV/VNAV DA	2884-1 250 (300-1)			
LNAV MDA	3040-1 406 (500-1)		3040-1 1/8 406 (500-1 1/8)	
C CIRCLING	3060-1 426 (500-1)	3100-1 466 (500-1)	3160-1 1/2 526 (600-1 1/2)	3320-2 1/4 686 (700-2 1/4)

MIRL Rwys 4-22 and 13-31 L
REIL Rwys 4, 13, 22 and 31 L

NW-1, 17 APR 2025 to 15 MAY 2025