
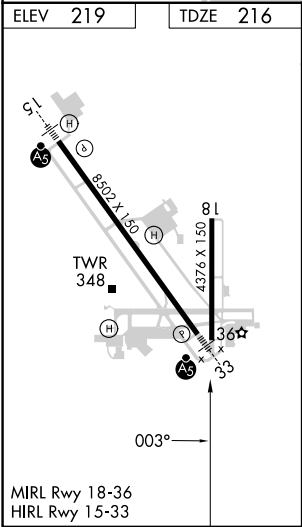


WAAS CH 50215 W36A	APP CRS 003°	Rwy Idg 4376 TDZE 216 Apt Elev 219
--	------------------------	---

RNAV (GPS) RWY 36
MOBILE RGNL (MOB)

RNP APCH - GPS.		MISSED APPROACH: Climb to 2000 direct CECAP and hold.			
Rwy 36 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C.					
ATIS 124.75 257.85	MOBILE APP CON ★ 118.5 269.3	MOBILE TOWER ★ 118.3 (CTAF) 0 239.0	GND CON 121.9 348.6	CLNC DEL 119.85	UNICOM 122.95

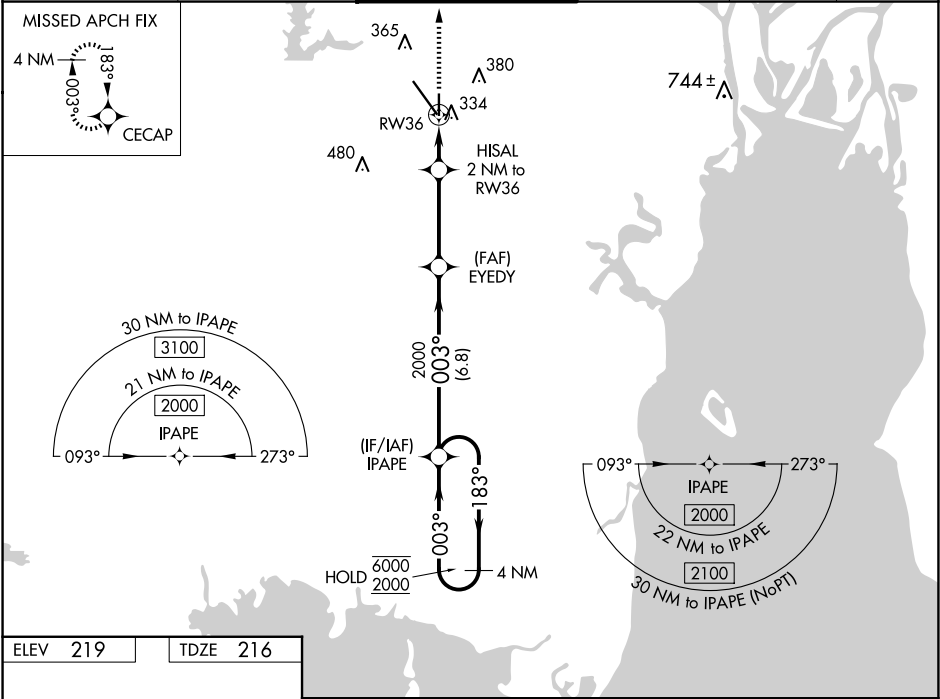

2000 CECAP		HISAL 2 NM to RW36		EYEDY 2000		IPAPE 4 NM Holding Pattern				
1 NM		1 NM		3.4 NM		6.8 NM				
CATEGORY	A	B	C	D						
LPV DA	482-7/8 266 (300-7/8)									
LNAV/VNAV DA	505-7/8 289 (300-7/8)									
LNAV MDA	600-1	384 (400-1)	600-1 1/8	384 (400-1 1/8)						
CIRCLING	680-1	461 (500-1)	740-1 1/2	521 (600-1 1/2)	780-2	561 (600-2)				