

LOC I-AGC <u>109.1</u>	APP CRS 281°	Rwy Idg 6501 TDZE 1251 Apt Elev 1252
----------------------------------	------------------------	---

ILS or LOC RWY 28

RADAR required.


T Autopilot coupled approach NA below 1900. Circling Rwy 13 NA
A at night. For inop ALS, increase S-LOC Cats C and D visibility to RVR
6000. Inop table does not apply to S-ILS 28.

MALS




MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct AGC VOR/DME and hold. continue climb-in-hold to 3000.

ATIS 120.55	PITTSBURGH APP CON 119.35 285.575	ALLEGHENY TOWER 121.1 239.0	GND CON 121.7
----------------	--------------------------------------	--------------------------------	------------------

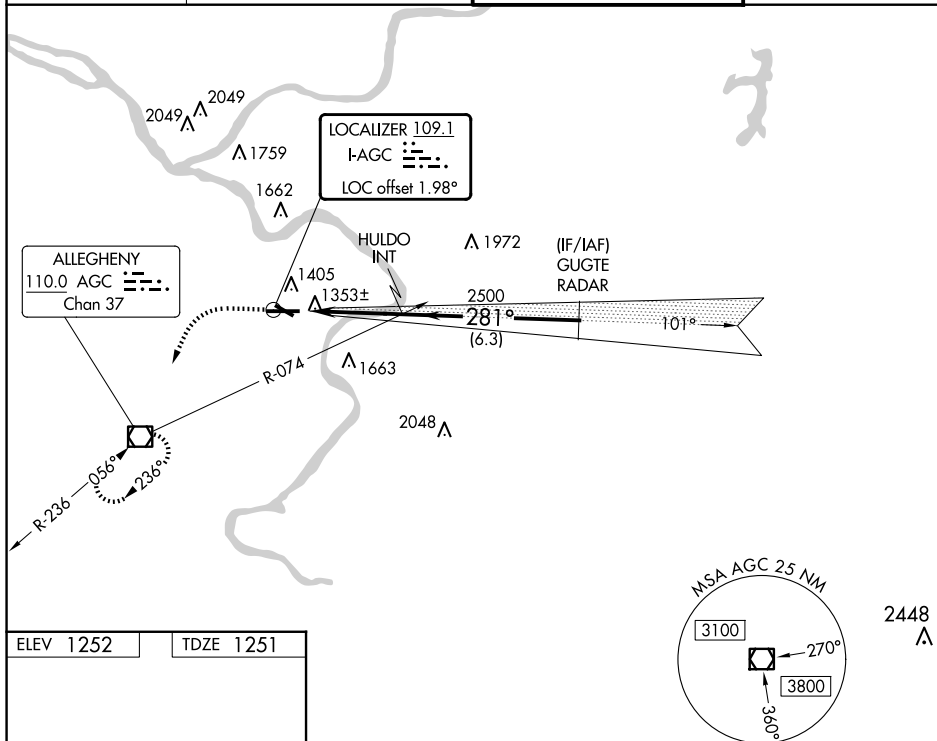

ELEV 1252		TDZE 1251
-----------	--	-----------



REIL Rwys 10, 13, and 31
HIRL Rwys 10-28 and 13-31

FAF to MAP 3.8 NM

Knots	60	90	120	150	180
Min:Sec	3:48	2:32	1:54	1:31	1:16

CATEGORY	A	B	C	D
S-ILS 28	1501/40		250 (300-¾)	
S-LOC 28	1660/40 409 (500-¾)		1660/50 409 (500-1)	
CIRCLING	1720-1 468 (500-1)		1980-2 728 (800-2)	1980-2¼ 728 (800-2¼)