


APP CRS	Rwy Idg	10011
347°	TDZE	4410
	Apt Elev	4415

RNAV (RNP) W RWY 35L


RENO/TAHOE INTL (RNO)

RNP AR APCH - GPS.	MALSR	MISSED APPROACH: Climb to 11000 on track 347° to TAKLE and hold, continue climb-in-hold to 11000. *Missed approach requires minimum climb of 300 feet per NM to 7140.
For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 35°C.		

D-ATIS	NORCAL APP CON	RENO TOWER	GND CON	CLNC DEL	CPDLC
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6	124.9 370.85	

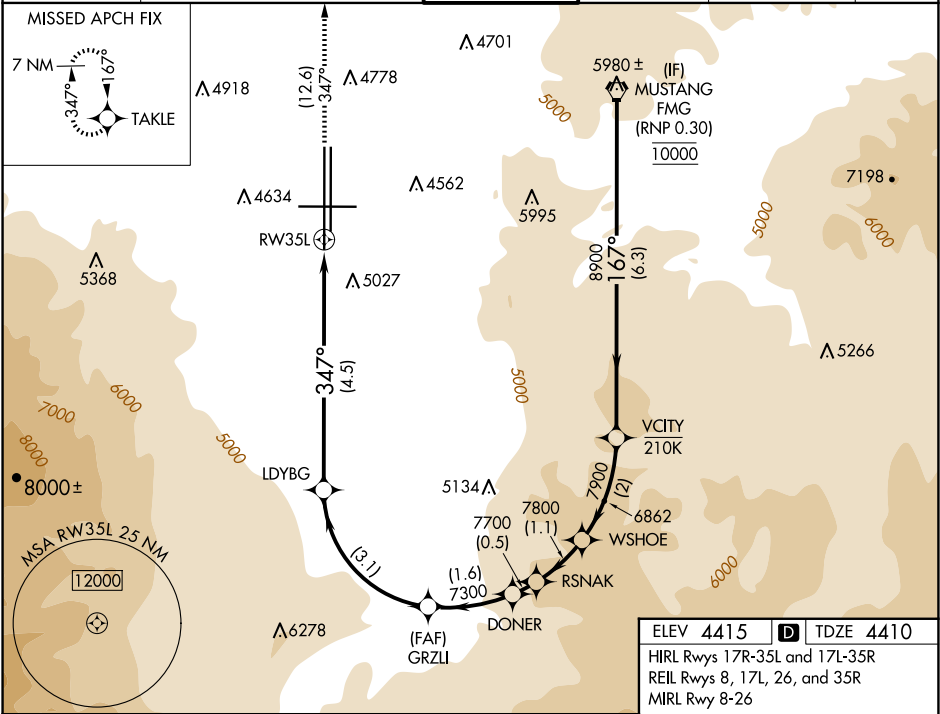

FMG VORTAC	VCITY	WSHOE	RSNAK	DONER	GRZLI	LDYBG	RW35L
10000	8900	7900	7800	7700	7300	6155	
GP 3.50°							
TCH 72							
	6.3 NM	2 NM	1.1 NM	0.5 NM	1.6 NM	3.1 NM	4.5 NM
CATEGORY	A	B	C	D			
RNP 0.10 DA*		4736-1/2	326 (400-1/2)				
RNP 0.30 DA		5349-2	939 (1000-2)				
AUTHORIZATION REQUIRED							

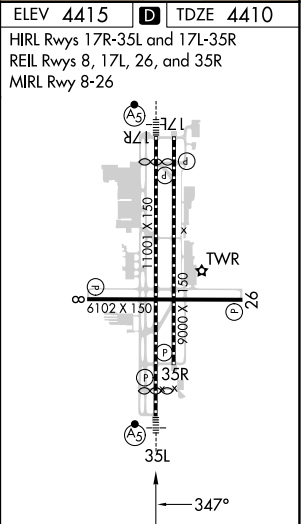

SW-4, 17 APR 2025 to 15 MAY 2025

SW-4, 17 APR 2025 to 15 MAY 2025